



**JBS® EQUIPMENT**

The field's the limit



**SMARTER  
EQUIPMENT  
FASTER  
FIELDWORK**





# JBS EQUIPMENT IS MOTIVATED BY PRIDE

The pride of our team is in the work they do. The pride of our dealers who sell JBS® machines. And the pride of farmers and agricultural professionals like you who know you can rely on JBS to help put food on the table - whether that's your family's table or the table of someone halfway across the continent. You do important work, which means that we do important work in supporting you.

Knowing the importance of agriculture helps us to never let up. Every day, we're in the field listening to our dealers and customers. Every day, we come into the shop knowing that design matters and that hidden welds are just as vital as the welds you see.

Every day, we support our customers with that same sense of urgency and human connection we've had since day one. That's who we will always strive to be. Because when you do important work, it's easy to be proud of what you do.



LOW-RIDER® SPREADER  
VMWB3042-50L

## CONTENTS

- 8 The JBS Equipment Process
- 12 Manure Spreaders
- 32 Track-Pack® Silage Bagger
- 38 Forage Trailers & Boxes
- 42 Dump Wagons
- 44 Bedding Flinger®
- 46 Machine Specs



**JBS EQUIPMENT**  
The field's the limit™



## A PROVEN LEADER IN MANURE SPREADER MANUFACTURING

Since 2005, we've made harvesting and spreading easier and more efficient for agricultural operations throughout North America. Every innovative and ultra-durable JBS machine is custom-engineered and built to the highest specifications in our state-of-the-art fabrication plant. As the recognized leader in manure spreader and silage bagger technology, we help you work faster and smarter.

*"JBS has allowed me to be more productive, and spread more tonnes per hour. My customers love the output - we spread faster and more evenly. And farmers love that we're using high-flotation, high-capacity, reliable machines and prescriptive spreading to allow us to spread more accurately, keeping their fields healthier."*

Jeff Richardson  
Richardson Manure Hauling  
Kearney, Nebraska



# A PROCESS WE BELIEVE IN

## PERFORMANCE DRIVEN

We design and manufacture the most technologically innovative spreaders, baggers, trailers, boxes, dump wagons, and flingers in the business.

Our technology delivers the highest performance and the highest quality. But don't take our word for it.

Talk to agricultural industry professionals and satisfied farmers who own a JBS machine and the dealers who stand by us.

## TRIED & TESTED

We know we can't change the weather, but we can leave you with one less thing to worry about in the field.

Meticulously engineered to perform in even the most rugged and unforgiving conditions, JBS machines offer industry-leading durability and reliability across any terrain.

## HIGHLY ENGINEERED

As a cutting-edge agricultural equipment manufacturer, we are development focused, relentlessly driving toward achieving industry-leading innovations.

We understand your unique challenges, and that knowledge informs every piece of technology we build. Our expert in-house R&D team designs products designed to exceed the highest technological standards.







## RESULTS FOCUSED

Our equipment is versatile, powerful and efficient, engineered to save you valuable time and effort in the field. Constantly innovating and improving based on your feedback, we create reliable, durable and innovative solutions for your unique challenges, helping make your work life easier and your agricultural operation more efficient and successful.

## EXPERT ASSEMBLY

We use revolutionary welding techniques and steel fabricating equipment at our 60,000ft<sup>2</sup> production facility to produce functional and durable machines. Everything from assembly and sandblasting to painting is done in-house by our team of experts. And we back every machine we build with a no-nonsense warranty.

## SERVICE ORIENTED

We pride ourselves on 100% customer satisfaction and we back it up with the best service guarantees in the industry. Connected to our dedicated dealer network that spans the US and Canada, you're never far from support.

## TRUSTED PARTNERS

We support and stand by our dealer partners, empowering them to go above and beyond for JBS customers. Just as we listen closely to our farmers to make improvements to JBS machines, we listen closely to our dealers to improve our processes, warranty programs, and customer support.





## EVERYTHING YOU NEED TO GET THE JOB DONE RIGHT

As a recognized industry leader in spreading technology, we offer a large range of quality crafted wide body, narrow body and truck mounted high-performance manure spreaders designed to meet the needs of your agricultural operation, no matter what size.

Built with ultra-durable components designed to withstand heavy use under even the harshest conditions, our spreaders are customizable and contain fully-welded, heavy-gauge steel that withstands the test of time.

Our rigorous field testing ensures that all components function perfectly and our spreaders perform the JBS way. For you, that means peace of mind knowing that you're working with the best in the business.

# MANURE SPREADERS



WIDE BODY SPREADER  
VMWB3048-36




# WIDE BODY SPREADER

## THE RIGHT TECHNOLOGY FOR THE MOST EFFICIENT FIELDWORK

Whether you operate a family farm or a large agricultural enterprise, JBS Wide Body Spreaders can handle all types of manure.

Among the largest in today's market, they come in **tandem** and **tridem axle** models, feature highly maneuverable suspensions, and boast carrying capacities between 46,000lbs and 100,000lbs.

With our optional bolt on silage kits they are workhorses during silage season and ideal for stockpiling manure in the off season. Able to spread all types of manure in all kinds of conditions, our equipment is built to handle any type of fieldwork you need done quickly and efficiently.

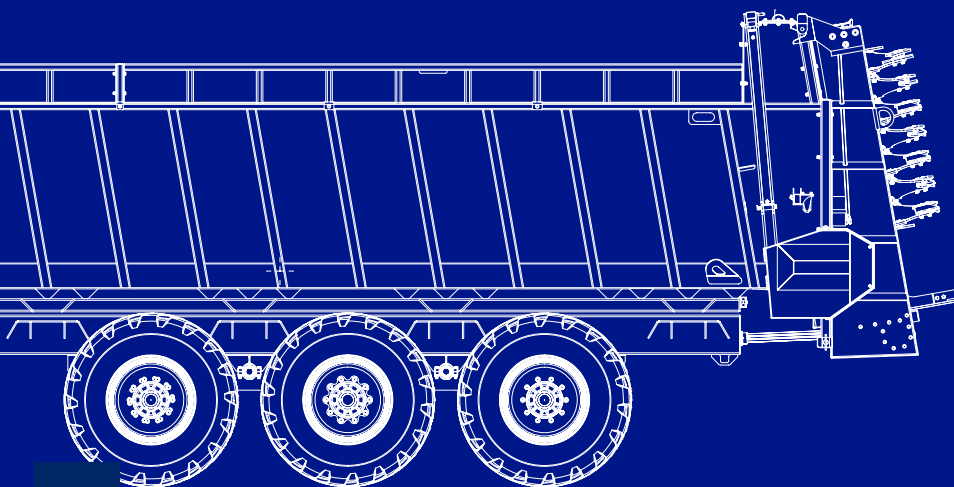

**QUICK-ATTACH  
VERTIMAX VERTICAL  
BEATERS**



**HYDRAULIC  
GUILLOTINE GATE**



**UHMW LOW-FRICTION,  
HARD-WEARING  
PLASTIC FLOOR**



**LONG-LINK 5/8" GRADE  
100 FLOOR CHAIN**



**OFFICIAL PREMIUM  
DECAL PACKAGE**

**WIDE BODY SPREADER**  
VMWB3448-48



**LENGTH**  
up to 34 ft

**LEVEL CAPACITY**  
up to 1006 ft³

**HEAPED CAPACITY**  
up to 1258 ft³

**CARRYING CAPACITY**  
up to 100,000 lbs

**EMPTY WEIGHT**  
up to 32,000 lbs



### OPTIONAL UPGRADES

#### Hurricane Beaters

Consistent and accurate spreading for low applications of lightweight and fine materials.

#### Hardox® Beaters

A wear-resistant steel that extends the life of your JBS beaters.

#### Silage Kit

Convert your Wide Body to a silage wagon.

#### Scale & Rate Controller System

For improved spreading accuracy.

#### Flight Protection System

Add extra protection for beater knives.



# FLOAT-MAXX SPREADER™ EFFORTLESSLY GLIDE ACROSS EVERY FIELD

Never worry about ground pressure in your fields again. The Float-Maxx Spreader offers the same great benefits of the Wide Body machine but with the lightest footprint of any comparable manure spreader on the market.

The JBS Float-Maxx has 8000 in<sup>2</sup> of ground contact per pair at all times and evenly spreads manure in virtually any environment, making it your best choice for low-compaction commercial spreading.

WIDE BODY



PRODUCES JUST 11 PSI  
OF GROUND PRESSURE



HUGE HEAPED  
CAPACITY OF 1500 FT<sup>3</sup>



INDUSTRY-LEADING  
CAMSO TRACK SYSTEM

FLOAT-MAXX SPREADER  
VMWB3042-55TR



8000IN<sup>2</sup> OF GROUND CONTACT AT ALL TIMES

**LENGTH**  
30 ft

**LEVEL CAPACITY**  
1175 ft<sup>3</sup>

**HEAPED CAPACITY**  
1500 ft<sup>3</sup>

**CARRYING CAPACITY**  
100,000 - 110,000 lbs

**EMPTY WEIGHT**  
33,000 lbs

**SUSPENSION**  
Camso Track System

**GROUND PRESSURE**  
11 PSI



## OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Hardox® Beaters**  
A wear-resistant steel that extends the life of your JBS beaters.

**Silage Kit**  
Convert your Wide Body to a silage wagon.

**Scale & Rate Controller System**  
For improved spreading accuracy.

**Flight Protection System**  
Add extra protection for beater knives.



**LENGTH**  
30 ft

**LEVEL CAPACITY**  
1100 ft<sup>3</sup>

**HEAPED CAPACITY**  
1450 ft<sup>3</sup>

**CARRYING CAPACITY**  
100,000 lbs

**EMPTY WEIGHT**  
35,000 lbs


**SUSPENSION**  
50 Tonne Hydraulic



**LOW-RIDER® SPREADER**  
VMWB3042-50L

## LOW-RIDER® SPREADER A STEP ABOVE THE REST

Delivering a smooth ride on even the toughest terrain, the Low-Rider® is our largest, most versatile spreader. Its low center of gravity and large tires combine with the optional JBS electronic steering system to provide on-field stability that your operation can count on.

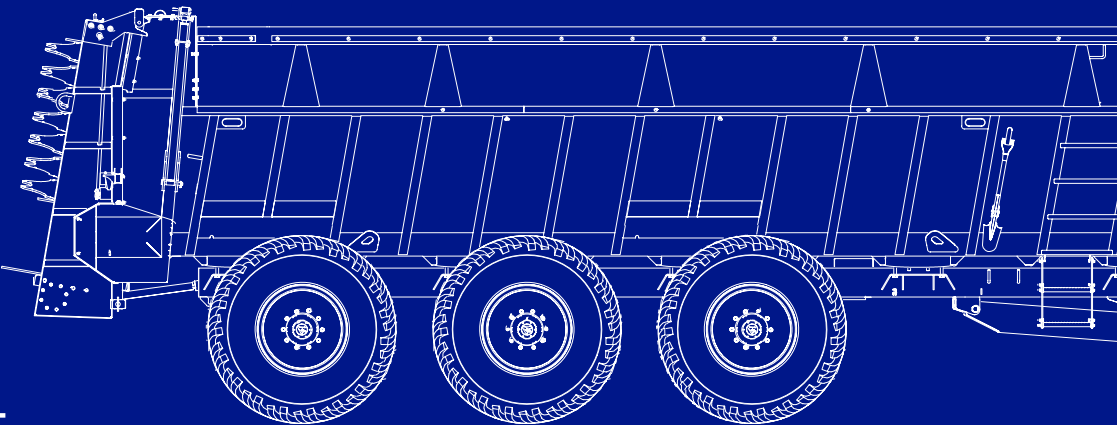

**50-TON HYDRAULIC  
SUSPENSION WITH  
WEIGHT TRANSFER AXLE**



**MASSIVE HEAPED  
CAPACITY OF 1450 FT<sup>3</sup>**



**ULTIMATE STABILITY ON  
UNEVEN TERRAIN**



**TOUGH AND RELIABLE  
750-60R-30.5 TIRES**



### OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Hardox® Beaters**  
A wear-resistant steel that extends the life of your JBS beaters.

**Silage Kit**  
Convert your Wide Body to a silage wagon.

**Scale & Rate Controller System**  
For improved spreading accuracy.

**Flight Protection System**  
Add extra protection for beater knives.

**Electronic Forced Steering System**  
Unbeatable maneuverability and flotation with the most advanced steering system on the market.


SPRING AND HYDRAULIC SUSPENSION FOR A SMOOTH RIDE IN EVEN THE ROUGHEST TERRAIN



# E-SERIES™ SPREADER

## THE POWERFUL YET AFFORDABLE CHOICE

Whether you run a large agricultural operation or a family farm, you'll get maximum work done quickly with our #1 best-selling spreader. Featuring the same innovative technology and quality construction as our commercial models, the E-Series™ Spreader comes with an upgraded long-link floor chain, quick-attach Vertimax beaters and steel idler sprockets. A heavy-duty yet affordable machine, it comes in a variety of sizes and can be loaded with even your smallest equipment.

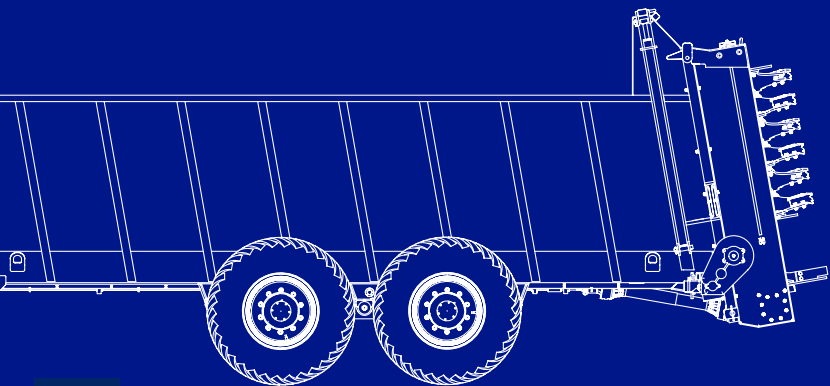

**QUICK-ATTACH  
VERTIMAX VERTICAL  
BEATERS**



**HYDRAULIC  
GUILLOTINE GATE**



**LOW MAINTENANCE  
HYDRAULIC GEARBOX**



**UHMW LOW FRICTION,  
HARD-WEARING  
PLASTIC FLOOR**



**LONG-LINK 5/8" GRADE  
100 FLOOR CHAIN**

**LENGTH**  
up to 26 ft

**LEVEL CAPACITY**  
up to 686 ft³

**HEAPED CAPACITY**  
up to 858 ft³

**CARRYING CAPACITY**  
up to 50,000 lbs

**EMPTY WEIGHT**  
up to 21,500 lbs



**E-SERIES™ SPREADER**  
VMEC2248



### OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Scale & Rate Controller System**  
For improved spreading accuracy.

**Flight Protection System**  
Add extra protection for beater knives.



**LENGTH**  
16 ft

**LEVEL CAPACITY**  
257 ft<sup>3</sup>

**HEAPED CAPACITY**  
361 ft<sup>3</sup>

**CARRYING CAPACITY**  
18,400 lbs

**EMPTY WEIGHT**  
6720 lbs

**M-SERIES™ SPREADER**  
MISP1636-14

## M-SERIES™ SPREADER

### SMALL ON SIZE, BIG ON WORKLOAD

JBS makes some of the industry's favorite commercial spreaders, but we recognize that not everyone needs a commercial-sized spreader. Some farms need a spreader that's more accessible, nimble, easier to store, and easier to tow. That's why we worked hard to bring you the M-Series™ Spreader - with all the quality and features of every other JBS spreader, packed into an easier-to-operate format.



**LOW-HORSEPOWER TRACTOR OPERATION**  
75-130 HP



**HYDRAULIC GUILLOTINE GATE**



**UHMW LOW-FRICTION, HARD-WEARING PLASTIC FLOOR**



**3/8" GRADE 100 FLOOR CHAIN**

**EXCEPTIONALLY LOW LOAD HEIGHT OF JUST 75"**





*“Our customers love JBS Equipment.  
Not only are JBS machines up for the challenge  
of all Iowa's seasons and conditions, their  
machines are reliable, well-built, and priced  
competitively for the quality.”*

Dan Koenen  
Post Equipment  
Rock Valley, Iowa




# TRUCK MOUNTED SPREADER SAFE ON THE ROAD, TOUGH IN THE FIELD

The most cost-effective solution for moving high volumes of manure, our Truck Mounted Spreader is suited for all types of applications, but especially fits the bill where substantial road travel is required. Built to travel safely on public roads – saving you time and money – it comes in both Narrow and Wide Body mounts, and can be easily converted for silage.

Available in

- NARROW BODY
- WIDE BODY

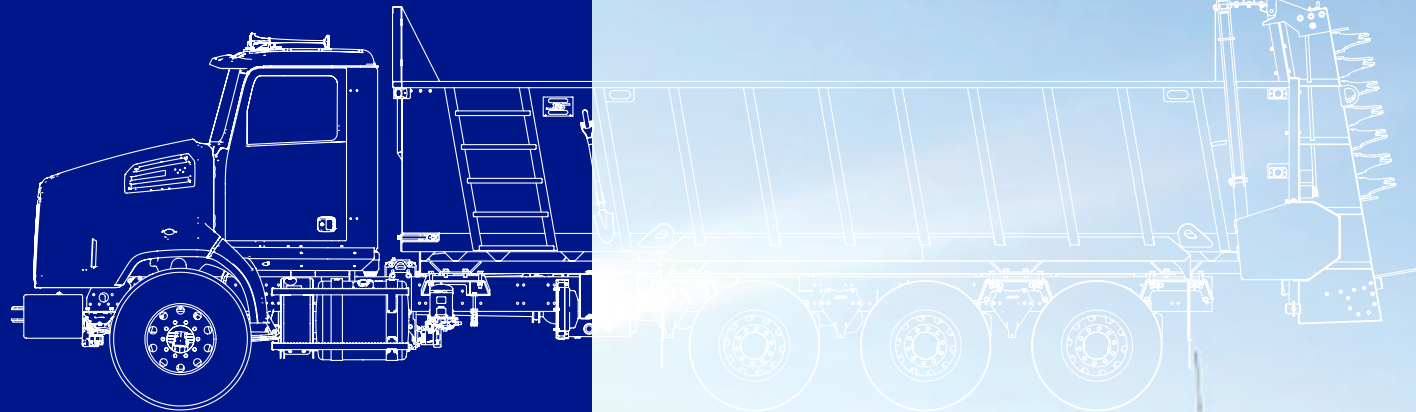

ALL WIDE OR NARROW BODY FEATURES



UHMW LOW FRICTION, HARD-WEARING PLASTIC FLOOR



SUPERIOR DIRECT DRIVE TO BEATERS



BASIC ECONOMIC OR HYDRAULIC PISTON PUMP CONTROLS



TRUCK MOUNTED SPREADER  
VMWBT2648

NARROW BODY LENGTH

up to 26 ft

WIDE BODY LENGTH

up to 26 ft

NARROW BODY HEAPED CAPACITY

up to 845 ft<sup>3</sup>

WIDE BODY HEAPED CAPACITY

up to 962 ft<sup>3</sup>



## OPTIONAL UPGRADES

### Hurricane Beaters

Consistent and accurate spreading for low applications of lightweight and fine materials.

### Silage Kit (Wide Body Only)

Convert your Wide Body to a silage wagon.

### Scale & Rate Controller System

For improved spreading accuracy.

### Flight Protection System


Add extra protection for beater knives.



# NARROW BODY SPREADER

## ENGINEERED TO HANDLE EVEN THE SMALLEST SPACES

Get even the toughest jobs done faster and easier with our spreader designed to operate in more confined spaces like feedlots. Featuring the same innovative technology and durable fully-welded components as our Wide Body machines, the JBS Narrow Body Spreader doesn't compromise on field compaction or capacity. Thoroughly field-tested, it's guaranteed to function at the highest standards, like every machine we build.

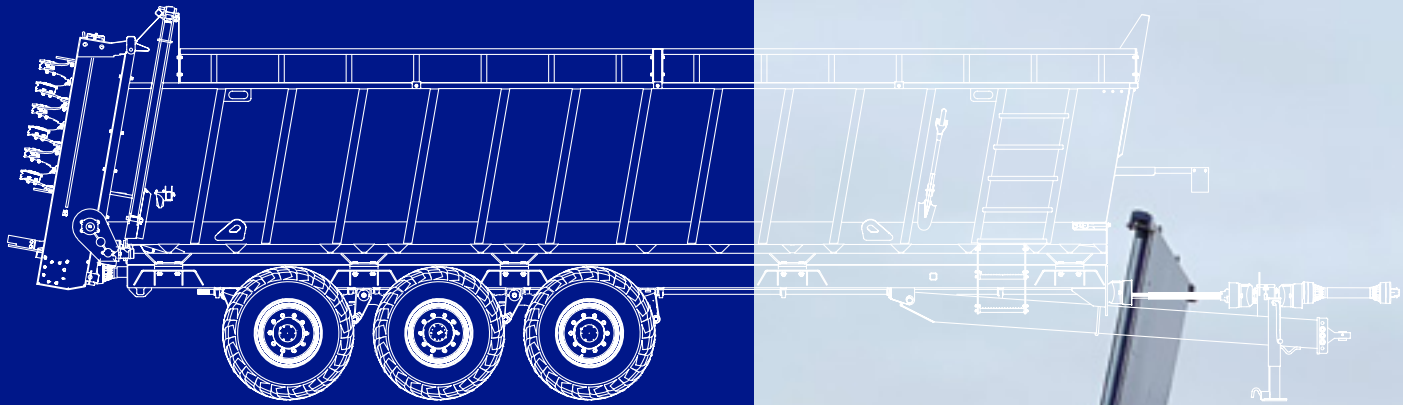

**QUICK-ATTACH  
VERTIMAX VERTICAL  
BEATERS**



**NARROW 6'6" BOX WIDTH**



**HYDRAULIC  
GUILLOTINE GATE**



**UHMW LOW-FRICTION,  
HARD-WEARING  
PLASTIC FLOOR**



**LONG-LINK 5/8" GRADE  
100 FLOOR CHAIN**



**OFFICIAL PREMIUM  
DECAL PACKAGE**



**NARROW BODY SPREADER**  
VM3048-36

**LENGTH**  
up to 30 ft

**LEVEL CAPACITY**  
up to 780 ft<sup>3</sup>

**HEAPED CAPACITY**  
up to 975 ft<sup>3</sup>

**CARRYING CAPACITY**  
up to 72,000 lbs

**EMPTY WEIGHT**  
up to 25,000 lbs



### OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Scale & Rate Controller System**  
For improved spreading accuracy.

**Flight Protection System**  
Add extra protection for beater knives.





# OPTIONAL UPGRADES

## HARDOX® BEATERS

A wear-resistant steel that extends the life of your JBS vertical beaters. Hardox® is hard through and through, from the surface deep down to its core, giving you extended service life and high productivity in the most challenging environments.

## FLIGHT PROTECTION SYSTEM

Protection for beater knives to reduce impact and maintenance and increase lifespan.

## SILAGE KIT

Put your JBS Spreader to work during harvest with a JBS Equipment customizable bolt on silage kit for your JBS Machine.

## SCALE AND VARIABLE RATE CONTROL PACKAGES

Get more accurate insights. JBS offers a wide variety of scale and variable rate packages from basic weight display to full Variable Rate packages.

## HURRICANE BEATERS

Consistent and accurate spreading for low applications of lightweight and fine materials.

The JBS Hurricane Attachment is an optional spreading attachment for JBS Manure Spreaders. Available in both Narrow Body and Wide Body set-ups.

With an adjustable rear gate and stackable center plates, the JBS Hurricane Attachments allow for fine-tuning and accuracy on even the lowest-rated products.


From lime products to compost and litters, the JBS Hurricane Attachments will be sure to give you accurate and even spread coverages over your fields.

Standard on all JBS Equipment Attachments is our Quick Attach Beater System, this allows for quick and effortless changing of beaters systems so you can put your time where it counts.



## FEATURES

- Can spread as low as 2 tons to the acre.
- Ideal for lighter / low moisture materials.
- Adjustable rear gate.
- Spreads up to 65 feet wide.
- Hardox™ spinners.

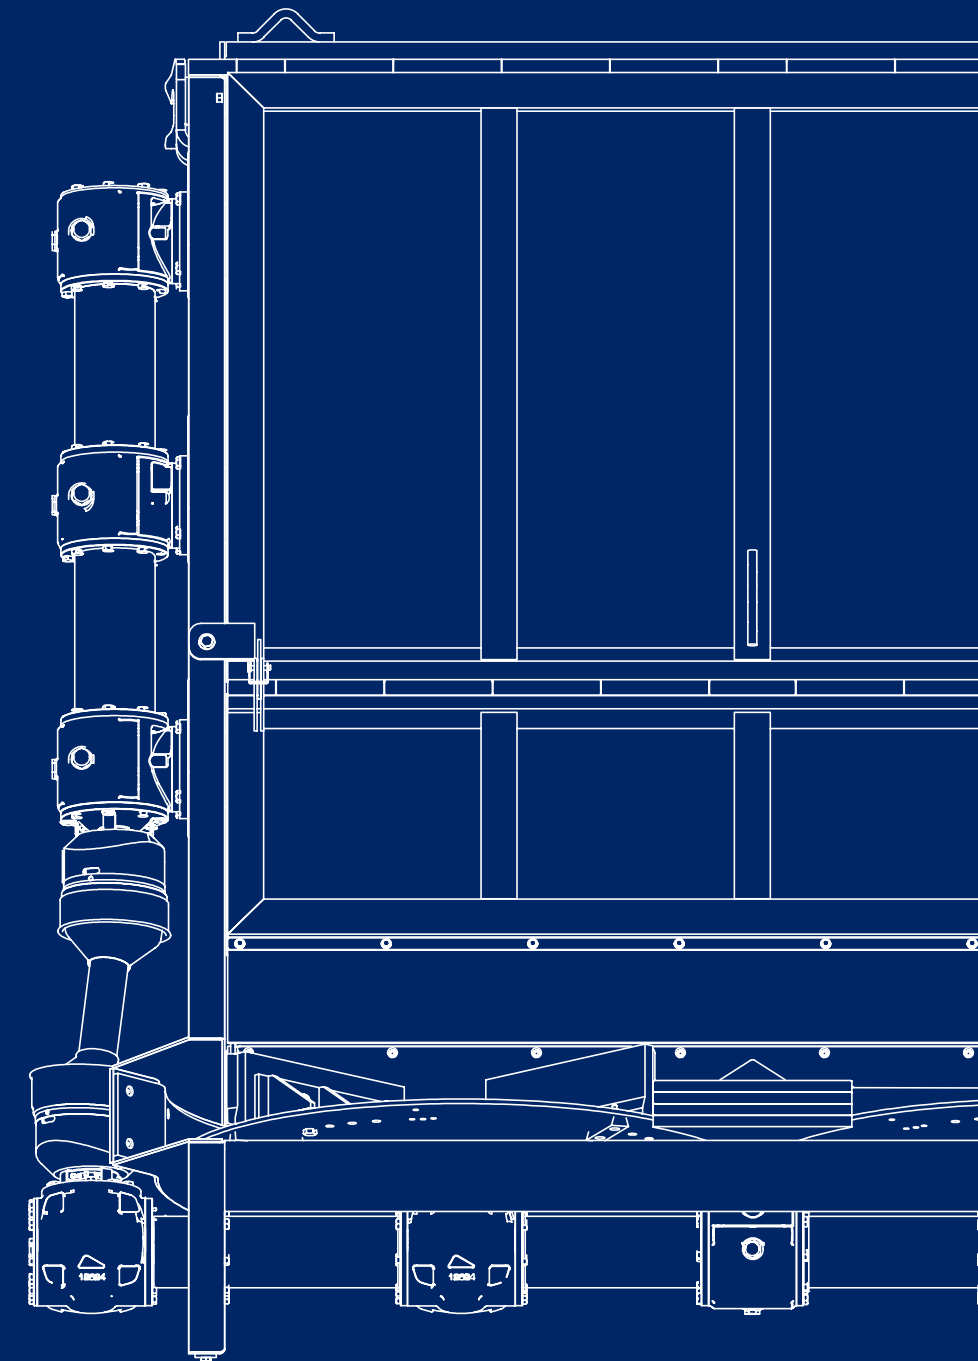






## REDUCED WASTE AND IMPROVED FEED QUALITY

Applying our proprietary cutting-edge technology to revolutionize the way silage baggers operate, this 100% hydraulically driven silage bagger has a Caterpillar C15 540hp Tier 4 power plant driving its state-of-the-art hydraulic system. Its solid rotor is driven hydraulically from both ends, by a rotary load sensing piston pump system, that is second-to-none. Removing the high-maintenance items such as belts, chains and gearboxes from the equation makes the JBS Track-Pack®

the most reliable machine in the field. Its hydraulically driven tracks and onboard computer system remove all need for cables, backstop or anchors, allowing for higher densities and better feed. High-flotation tracks with optional steel cleats allow you to keep moving where others can't.

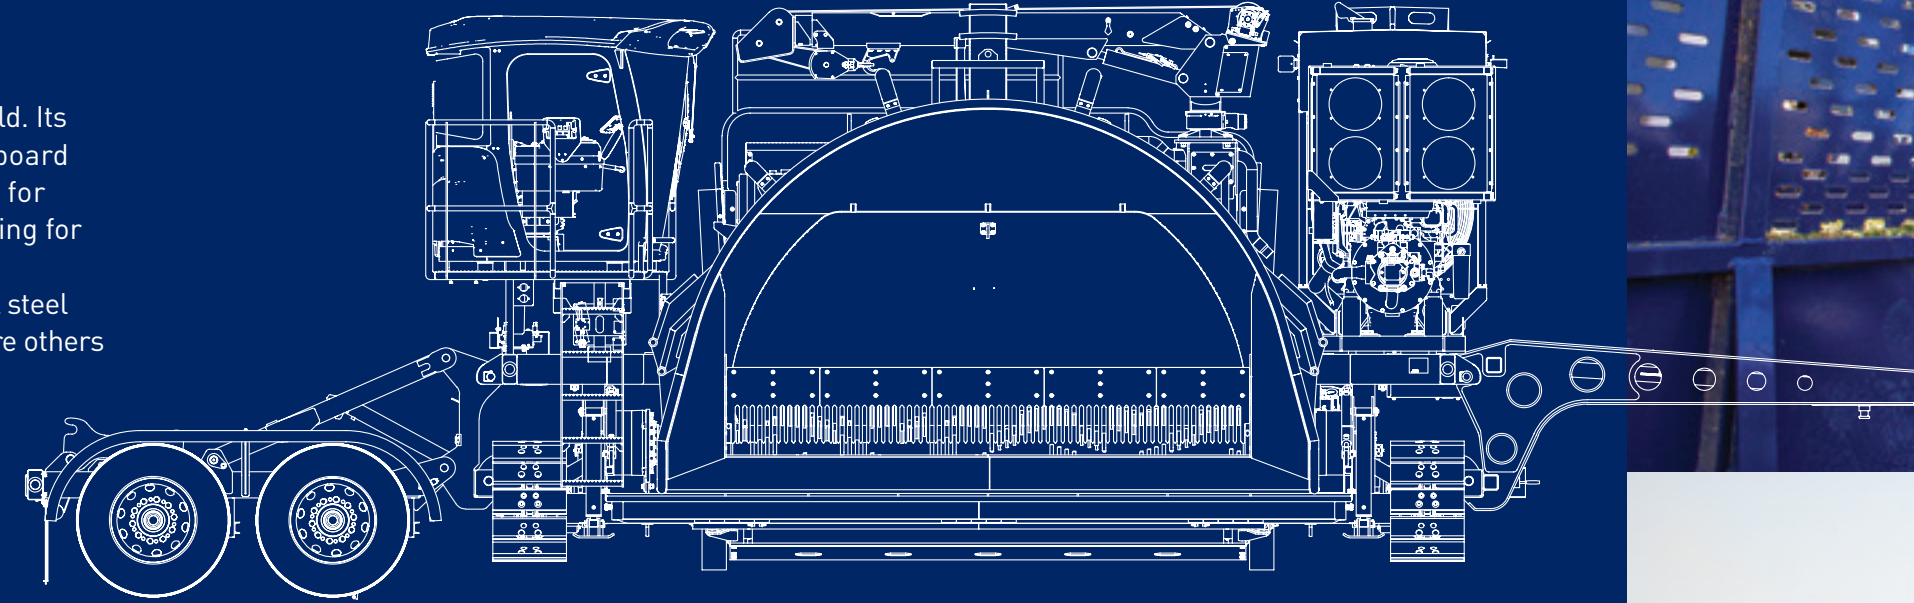

# TRACK-PACK® SILAGE BAGGER

**CAT**  
Power

Engineered with







STATE-OF-THE-ART 100%  
HYDRAULIC SYSTEM DRIVEN  
BY A CATERPILLAR C15.  
540HP TIER 4 POWER PLANT

5TH WHEEL HITCH



WIRELESS-  
CONTROLLED  
CRANE



SPACIOUS  
CAB



HEAT  
AND A/C



DUAL LCD  
MONITORING  
SYSTEM



AIR RIDE SEAT



TANDEM  
AXLE AIR RIDE  
SUSPENSION



WIDEST AND MOST  
DURABLE FEED TABLE  
IN THE INDUSTRY WITH  
OVERSIZED WHEELS

HYDRAULICALLY  
DRIVEN SOLID  
FEED ROTOR




## JBS TRACK-PACK® TECHNOLOGY THE ONLY TRACK-DRIVEN BAGGER IN THE WORLD

We know that unpredictable anchor-packed silage can pose issues for demanding farmers and operators, so our engineers created a better solution. Tracks on the Track-Pack Silage Bagger serve two purposes: they keep you moving steadily on difficult terrain, while packing your silage consistently.

This technology results in higher feed compaction. But what does this mean for your field? Track-Pack silage has an extended storage life and produces less waste, keeping your feed healthier for longer.

Engineered with

**JBS TRACK-PACK**

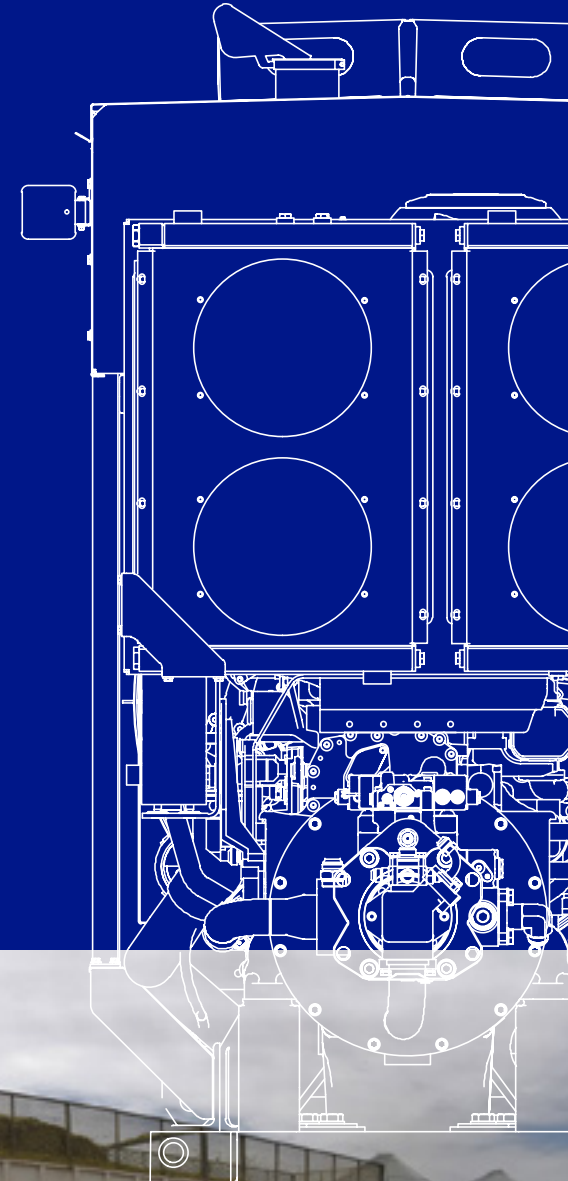

*"We can always depend on JBS Equipment. The Silage Bagger has changed the way we handle feed. It utilizes the best available technology while being extremely simple to use. On top of that, their service is next to none."*


**Byron Slingerland**  
Slingerland Feeders  
Lethbridge, Alberta





**BUILT RUGGED TO  
WITHSTAND THE  
TEST OF TIME**

Designed, engineered and built to the same exacting standards as our spreaders, JBS trailers and boxes offer the flexibility and features you need to take on even the most challenging jobs.

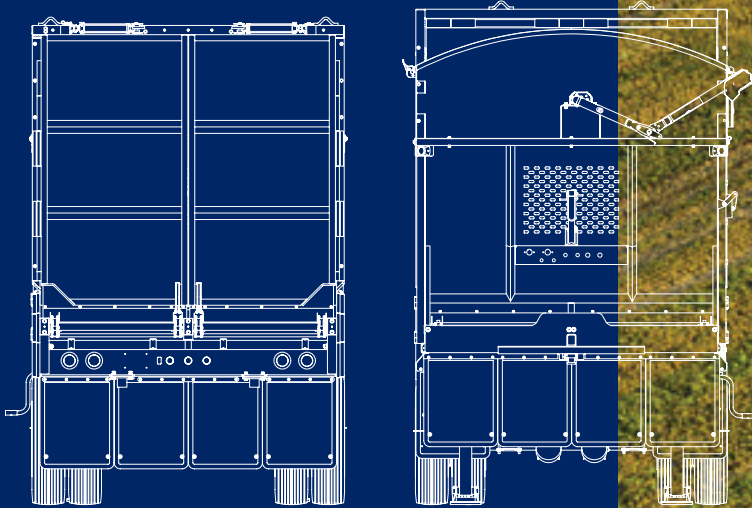

# FORAGE TRAILERS & BOXES

FORAGE BOX  
CT4048

**FORAGE  
TRAILERS  
FOR QUICKER  
UNLOAD**

Ruggedly built to withstand the test of time, JBS Forage Trailers are fully customizable and come in a variety of lengths. They unload quickly and come standard with a manual swing door, with multiple optional door configurations.

- LENGTH**  
up to 52 ft
- LEVEL CAPACITY**  
up to 2496 ft<sup>3</sup>
- HEAPED CAPACITY**  
up to 2912 ft<sup>3</sup>
- WALL EXT CAPACITY**  
up to 3744 ft<sup>3</sup>

Available in

PULL-TYPE

**FORAGE  
BOXES  
RELIABLE  
FOR YEARS**

JBS Forage Boxes feature heavy-duty construction and quality sandblasting, with primer and paint that lasts. These boxes also have manual swing doors in multiple configurations.

- LENGTH**  
up to 34 ft
- LEVEL CAPACITY**  
up to 1632 ft<sup>3</sup>
- HEAPED CAPACITY**  
up to 1904 ft<sup>3</sup>
- WALL EXT CAPACITY**  
up to 2448 ft<sup>3</sup>

Available in

TRUCK MOUNT PULL-TYPE





# COMBINATION TRAILER

## THE ULTIMATE IN OPERATIONAL VERSATILITY

An industry leader, this fully welded heavy-duty trailer easily switches from a manure spreader to a forage trailer. Ideal for long hauls getting to the field, helping to reduce the amount of equipment you need. It comes standard with a Vertimax, with twin vertical augers and a hydraulic guillotine gate, spreads up to 55', and handles all manure types and other materials.

With the capacity of the JBS Combination Trailer, you'll never again need to stockpile spreadable manure in the field.

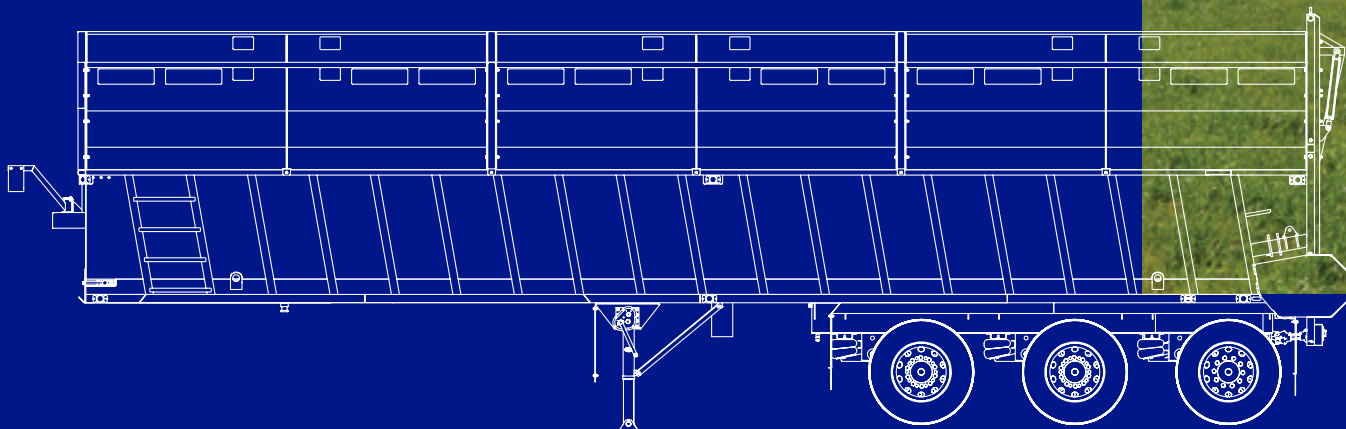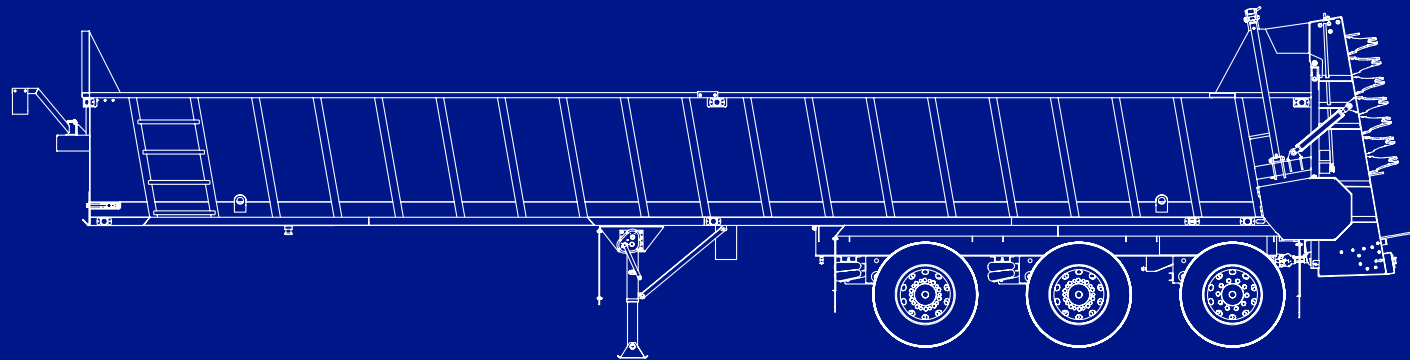

**QUICK-ATTACH  
VERTIMAX VERTICAL  
BEATERS**



**HYDRAULIC  
GUILLOTINE GATE**



**UHMW LOW FRICTION,  
HARD-WEARING  
PLASTIC FLOOR**



**5/8" GRADE 100 FLOOR  
CHAIN (OPTIONAL)**



**STATE-OF-THE-ART  
HYDRAULIC DRIVE SYSTEM  
WITH IN CAB LCD MONITOR  
AND CONTROLS**



**4' SPREADER  
WALL HEIGHT**

**up to  
8' FORAGE  
WALL HEIGHT**



**LENGTH**  
up to 40 ft

**LEVEL CAPACITY  
FORAGE**  
up to 2400 ft³

**LEVEL CAPACITY  
MANURE**  
up to 1200 ft³

**HEAPED CAPACITY  
FORAGE**  
up to 2700 ft³

**HEAPED CAPACITY  
MANURE**  
up to 1500 ft³

### OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Hardox® Beaters**  
A wear-resistant steel that extends the life of your JBS beaters.

**Working Lights**  
Powerful illumination in the field.


**Manual & Electric Tarp System**  
Cover your commodities in transit.





## THE FASTEST DUMPING WAGON IN THE INDUSTRY.

Tandem, Tridem and Quadrem axle configurations available with a ton of added features and additional options.

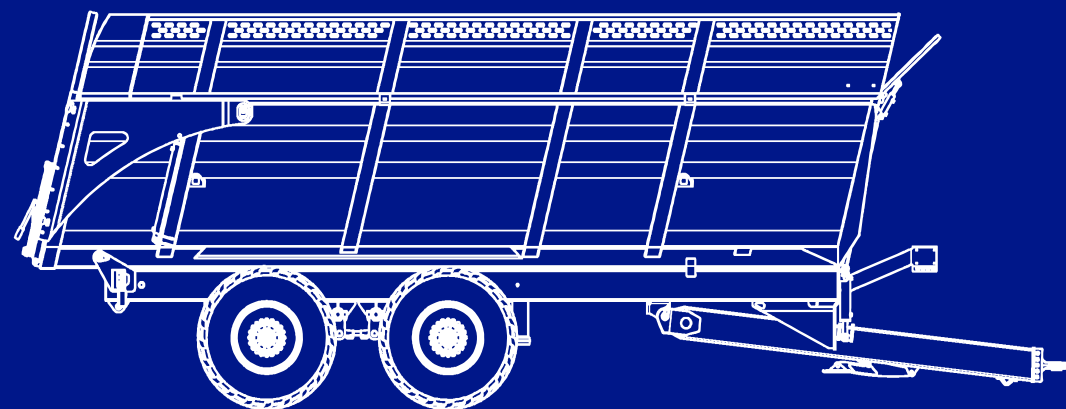


# D-SERIES™ DUMP WAGON

**LENGTH**  
up to 35 ft

**SILAGE CAPACITY**  
up to 77,000 lbs


**SUSPENSION**  
Tandem  
Tridem  
Quadrem

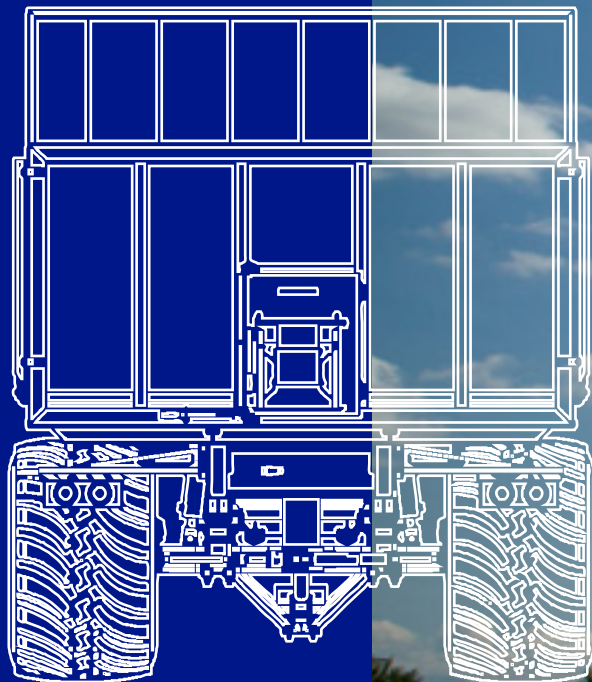

D-SERIES DUMP WAGON  
DWXB2658-34





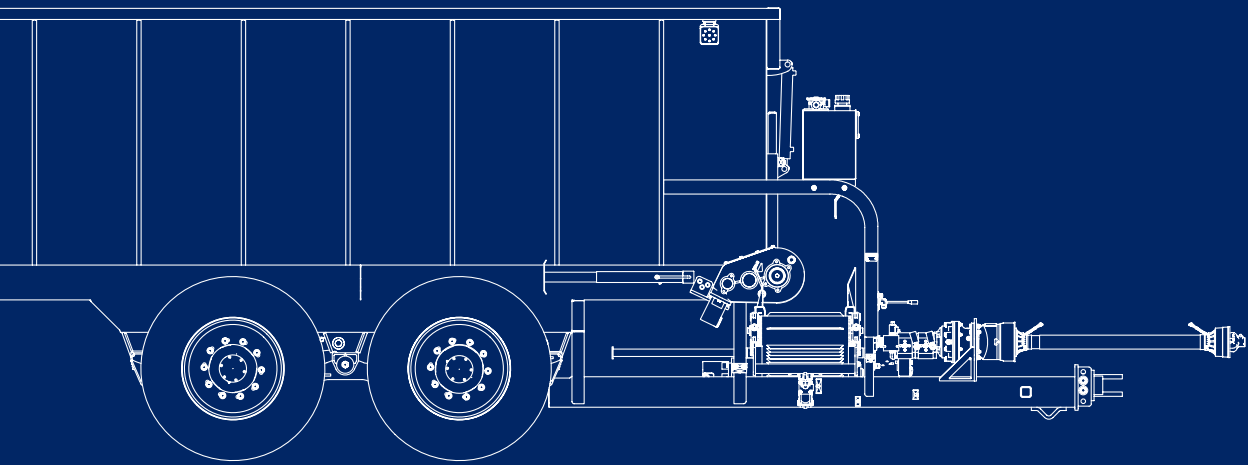

## POWERFUL YET FLEXIBLE PERFORMANCE


Available in pull-type and truck mount, the JBS Bedding Flinger can bed with sand, sawdust, or green bedding. It comes with a standard heavy-duty 88K chain, hydraulic front door to meter sand flow, high-torque motor for increased power and reliability, and a bi-directional discharge conveyor.

# BEDDING FLINGER®




BEDDING FLINGER™  
BF1248

**LENGTH**  
up to 16 ft  
**CAPACITY**  
up to 40,128 lbs  
**VOLUME**  
up to 14 yds

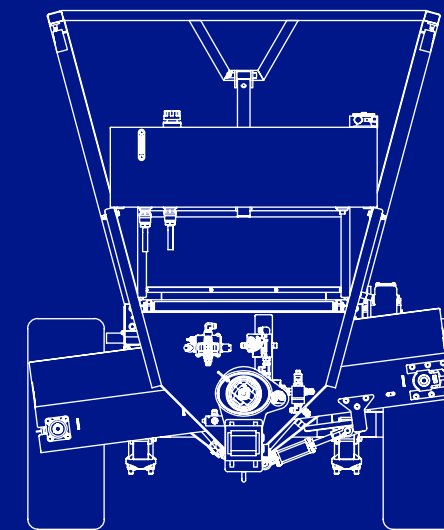

Available in

PULL-TYPE

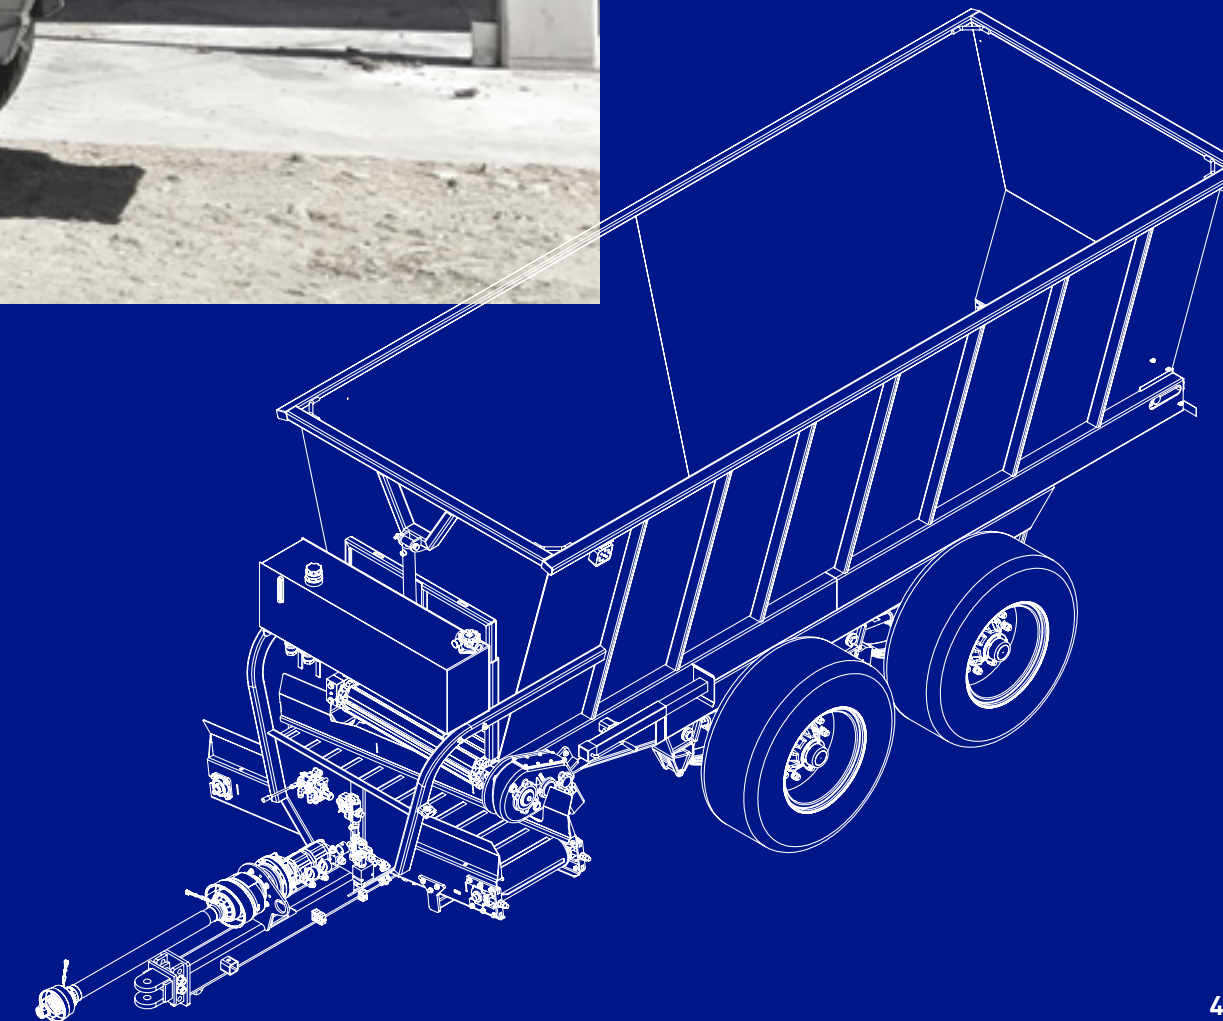



# MACHINE SPECS







	PULL TYPE BASE MODEL						
MODEL	VMWB2448-23	VMWB2648-34	VMWB3048-36	VMWB3048-48	VMWB3048-50	VMWB3448-48	VMWB3448-50
DIMENSION							
Overall Length (in)	413	437	485	534	534	582	582
Overall Height (in)	140	145	146	146	146	167	167
Overall Width (in)	125	127	125	125	125	125	125
Inside Box Width (in)	88	88	88	88	88	88	88
Inside Box Length (in)	264	288	336	336	336	384	384
Load Height (in)	111	117	114	117	119	116	119
Level Capacity (ft³)	710	800	888	888	888	1006	1006
Heaped Capacity (ft³)	888	975	1110	1110	1110	1258	1258
Carrying Capacity (lbs)	46,000	68,000	72,000	96,000	100,000	96,000	100,000
Empty Weight (lbs)	24,500	27,700	23,500	25,000	26,500	30,500	32,000
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES							
Suspension	Spring	Spring	Spring	Spring	Hydraulic	Spring	Hydraulic
Axle	Tandem	Tandem	Tridem	Tridem	Tridem	Tridem	Tridem
Tire Size	700/40-22.5	750/45R-26.5	700/40R-22.5	750/45R-26.5	750/45R-26.5	750/45R-26.5	750/45R-26.5
Tire Options	No	Yes	No	Yes	Yes	No	No
End Gate	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Hitch Type	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle
Decal Package	Premium	Premium	Premium	Premium	Premium	Premium	Premium
APRON/FLOOR							
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Floor Drive	Dual	Dual	Dual	Dual	Dual	Dual	Dual
Planetary Drive	Optional	Optional	Yes	Yes	Yes	Yes	Yes
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS							
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hardox® Beaters	Optional	Optional	Optional	Optional	Optional	Optional	Optional
MECHANICAL							
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Hydraulic Brakes	Optional	Optional	Optional	Yes	Yes	Yes	Yes
Steering Axle(s)	Optional	Optional	Optional	Yes	Yes	Yes	Yes
Rear Drive Shaft Diameter (in)	2 3/16	2 3/16	2 3/16	2 7/16	2 7/16	2 7/16	2 7/16
OPTIONAL UPGRADES							
Silage Kit	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Electronic Steering	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional	Optional	Optional	Optional

The field's the limit



MODEL	VMWB3042-50TR
DIMENSION	
Overall Length (in)	534
Overall Height (in)	140
Overall Width (in)	126
Inside Box Width (in)	88
Inside Box Length (in)	336
Load Height (in)	105
Level Capacity (ft³)	1175
Heaped Capacity (ft³)	1500
Carrying Capacity (lbs)	100,000 - 110,000
Empty Weight (lbs)	33,000
Box Construction	10 Gauge
STANDARD FEATURES	
Suspension	CAMSO Track System
Axle	Tracks
Tire Size	N/A
Tire Options	N/A
End Gate	Guillotine
Bulkhead	Standard
Hitch Type	Standard or Equal Angle
Decal Package	Premium
APRON/FLOOR	
Floor Chain	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes
Floor Drive	Dual
Planetary Drive	Yes
UHMW Plastic Floor	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings
BEATERS	
Vertimax Vertical Beaters	Yes
Hurricane Beaters	Optional
Quick Attach Beaters	Yes
Hardox® Beaters	Optional
MECHANICAL	
Beater Protection	Shear Bolt
Hydraulic Brakes	Yes
Steering Axle(s)	N/A
Rear Drive Shaft Diameter (in)	2 7/16
OPTIONAL UPGRADES	
Silage Kit	Optional
Wall Extensions	Optional
Scale and Rate Controller Systems	Optional
Electronic Steering	Optional
Flight Protection System	Optional





	PULL TYPE		
MODEL	VMWB2630-34L	VMWB3042-48L	VMWB3042-50L
DIMENSIONS			
Overall Length (in)	437	486	534
Overall Height (in)	146	156	146
Overall Width (in)	161	161	162
Inside Box Width (in)	82	82	88
Inside Box Length (in)	290	336	336
Load Height (in)	122	132	108
Level Capacity (ft³)	780	1100	1100
Heaped Capacity (ft³)	918	1260	1450
Carrying Capacity (lbs)	68,000	96,000	100,000
Empty Weight (lbs)	29,700	37,300	35,500
Box Construction	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES			
Suspension	Spring	Spring	Hydraulic
Axle	Tandem	Tridem	Tridem
Tire Size	750-60R-30.5	750-60R-30.5	750-60R-30.5
Tire Options	No	No	No
End Gate	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard
Hitch Type	Equal Angle	Equal Angle	Equal Angle
Decal Package	Premium	Premium	Premium
APRON/FLOOR			
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes
Floor Drive	Dual	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS			
Vertimax Vertical Beaters	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes
Hardox® Beaters	Optional	Optional	Optional
MECHANICAL			
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt
Hydraulic Brakes	Yes	Yes	Yes
Steering Axle(s)	Yes	Yes	Yes
Rear Drive Shaft Diameter (in)	2 7/16	2 7/16	2 7/16
OPTIONAL UPGRADES			
Silage Kit	No	No	No
Wall Extensions	Included	Included	Optional
Scale and Rate Controller Systems	Yes	Yes	Optional
Flight Protection System	Optional	Optional	Optional



LOW-RIDER SPREADER  
VMWB2630-34L





	PULL TYPE			
MODEL	VM2248-23	VM2448-23	VM2648-23	VM3048-36
DIMENSIONS				
Overall Length (in)	381	405	429	477
Overall Height (in)	140	140	140	140
Overall Width (in)	107	107	107	107
Inside Box Width (in)	78	78	78	78
Inside Box Length (in)	240	264	288	338
Load Height (in)	111	111	111	112
Level Capacity (ft³)	572	624	676	780
Heaped Capacity (ft³)	715	780	845	975
Carrying Capacity (lbs)	46,000	46,000	46,000	72,000
Empty Weight (lbs)	16,500	17,500	18,500	25,000
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES				
Suspension	Spring	Spring	Spring	Spring
Axle	Tandem	Tandem	Tandem	Tridem
Tire Size	550/45-22.5	550/45-22.5	700/40-22.5	700/40-22.5
Tire Options	Yes	Yes	No	No
End Gate	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard
Hitch Type	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle
Decal Package	Premium	Premium	Premium	Premium
APRON/FLOOR				
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes
Floor Drive	Single	Dual	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS				
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes
Hardox® Beaters	No	No	No	No
MECHANICAL				
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Hydraulic Brakes	Optional	Optional	Optional	Optional
Steering Axle(s)	Optional	Optional	Optional	Optional
Rear Drive Shaft Diameter (in)	2 3/16	2 3/16	2 3/16	2 3/16
OPTIONAL UPGRADES				
Silage Kit	No	No	No	No
Wall Extensions	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional



FLOAT MAXX SPREADER  
VMWB3042-55TR





	PULL TYPE						
MODEL	VMEC1636SA	VMEC1648	VMEC1848	VMEC2048	VMEC2248	VMEC2448	VMEC2648
DIMENSIONS							
Overall Length (in)	294	296	319	337	361	385	409
Overall Height (in)	118	118	118	122	122	122	122
Overall Width (in)	135	132	135	135	135	135	135
Inside Box Width (in)	78	78	78	78	78	78	78
Inside Box Length (in)	168	168	192	216	240	264	288
Load Height (in)	76	89	89	91	91	91	91
Level Capacity (ft³)	317	369	421	473	525	577	629
Heaped Capacity (ft³)	425	454	517	581	645	706	769
Carrying Capacity (lbs)	25,000	50,000	50,000	50,000	50,000	50,000	50,000
Empty Weight (lbs)	9000	10,500	12,500	14,500	16,500	18,500	21,500
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES							
Suspension	Spring	Spring	Spring	Spring	Spring	Spring	Spring
Axle	Single	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Tire Size	560/45-22.5	560/45-22.5	560/45-22.5	600/50-22.5	600/50-22.5	600/50-22.5	600/50-22.5
Tire Options	Yes	Yes	Yes	Yes	Yes	Yes	Yes
End Gate	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Hitch Type	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Decal Package	Basic	Basic	Basic	Basic	Basic	Basic	Basic
APRON/FLOOR							
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Floor Drive	Single	Single	Single	Single	Dual	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS							
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hardox® Beaters	No	No	No	No	No	No	No
MECHANICAL							
Horse-power (HP) Requirements	110-150	125-150	140-175	160-200	175-225	185-220	200-275
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Hydraulic Brakes	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Steering Axle(s)	No	No	No	No	No	No	No
Rear Drive Shaft Diameter (in)	2 3/16	2 3/16	2 3/16	2 3/16	2 3/16	2 3/16	2 3/16
OPTIONAL UPGRADES							
Silage Kit	No	No	No	No	No	No	No
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional	Optional	Optional	Optional

The field's the limit



MODEL	MISP1636-14
DIMENSIONS	
Overall Length (in)	256
Overall Height (in)	98
Overall Width (in)	103
Inside Box Width (in)	64
Inside Box Length (in)	178
Load Height (in)	75
Level Capacity (ft³)	257
Heaped Capacity (ft³)	361
Carrying Capacity (lbs)	18,400
Empty Weight (lbs)	6,720
Box Construction	10 Gauge
STANDARD FEATURES	
Suspension	Spring
Axle	Tandem
Tire Size	500/50-R17
Tire Options	No
End Gate	Guillotine
Bulkhead	Standard
Hitch Type	Standard
Decal Package	Basic
APRON/FLOOR	
Floor Chain	3/8" Grade 100
Removable Cross Slats	Yes
Floor Drive	Single
UHMW Plastic Floor	Yes
Sprockets	Steel Drive Sprocket; Nylon Idler
BEATERS	
Vertimax Vertical Beaters	Yes
Hurricane Beaters	No
Quick Attach Beaters	No
Hardox® Beaters	No
MECHANICAL	
Horse-power (HP) Requirements	90
Beater Protection	Shear Bolt
Hydraulic Brakes	No
Steering Axle(s)	No
Rear Drive Shaft Diameter (in)	2
OPTIONAL UPGRADES	
Silage Kit	No
Wall Extensions	No
Scale and Rate Controller Systems	No
Flight Protection System	No





	NARROW BODY				
MODEL	VMT1848	VMT2048	VMT2248	VMT2448	VMT2648
DIMENSIONS					
Overall Length (in)	252	276	300	324	348
Overall Height (in)	92	92	92	92	92
Overall Width (in)	100	100	100	100	100
Inside Box Width (in)	78	78	78	78	78
Inside Box Length (in)	192	216	240	264	288
Load Height (in)	N/A	N/A	N/A	N/A	N/A
Level Capacity (ft³)	468	520	572	624	676
Heaped Capacity (ft³)	585	650	715	780	845
Carrying Capacity (lbs)	N/A	N/A	N/A	N/A	N/A
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES					
End Gate	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard	Standard
Decal Package	Basic	Basic	Basic	Basic	Basic
Fenders with Mud Flaps	Yes	Yes	Yes	Yes	Yes
Fold Away Lights	Yes	Yes	Yes	Yes	Yes
APRON/FLOOR					
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes	Yes
Floor Drive	Single	Single	Single	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS					
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes
Hardox® Beaters	No	No	No	No	No
MECHANICAL					
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Rear Drive Shaft Diameter (in)	2 3/16	2 3/16	2 3/16	2 7/16	2 7/16
Controls	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic
OPTIONAL UPGRADES					
Silage Kit	No	No	No	No	No
Wall Extensions	Optional	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional	Optional



	WIDE BODY				
MODEL	VMWBT1848	VMWBT2048	VMWBT2248	VMWBT2448	VMWBT2648
DIMENSIONS					
Overall Length (in)	264	288	312	336	360
Overall Height (in)	92	92	92	92	92
Overall Width (in)	102	102	102	102	102
Inside Box Width (in)	88	88	88	88	88
Inside Box Length (in)	192	216	240	264	288
Load Height (in)	N/A	N/A	N/A	N/A	N/A
Level Capacity (ft³)	533	592	651	710	769
Heaped Capacity (ft³)	666	740	814	888	962
Carrying Capacity (lbs)	N/A	N/A	N/A	N/A	N/A
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES					
End Gate	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard	Standard
Decal Package	Premium	Premium	Premium	Premium	Premium
Fenders with Mud Flaps	Yes	Yes	Yes	Yes	Yes
Fold Away Lights	Yes	Yes	Yes	Yes	Yes
APRON/FLOOR					
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes	Yes
Floor Drive	Single	Single	Single	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS					
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes
Hardox® Beaters	No	No	No	No	No
MECHANICAL					
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Rear Drive Shaft Diameter (in)	2 3/16	2 3/16	2 7/16	2 7/16	2 7/16
Controls	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic
OPTIONAL UPGRADES					
Silage Kit	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional	Optional





MODEL	SB1012	SB1214
DIMENSIONS		
Length (ft/in)	21'12"	22'5"
Height (ft/in)	12'5"	12'7"
Width (ft/in)	22'11"	24'2"
Tunnel Size (ft)	10 or 12	12 or 14
Feed Table Width (ft/in)	9'6"	9'6"
Rotor Packing Width (ft)	10	10 or 12
Tunnel Extension	Yes	Yes
Table Belt Width (ft)	8'6"	10'6"
Collapsible Table Wings	Yes	Yes
Beater Bars	2	2
BODY (TRANSPORT)		
Length (ft/in)	41'4"	42'7"
Height (ft/in)	13'5"	13.5"
Width (ft)	10	10
Weight (lbs)	56,000	64,000
Ground Clearance (in)	12	12
BASE		
Hitch Type	5th Wheel or Pintel	5th Wheel or Pintel
Track Type	Steel Or Rubber Cleats	Steel Or Rubber Cleats
MECHANICAL		
Engine	CAT C9 415hp Tier IV Final w/Auto Reverse Fan	CAT C15 540hp Tier IV Final w/Auto Reverse Fan
Motor Type	Rotary Piston Hydraulic	Rotary Piston Hydraulic
Rotor	Solid	Solid
System Monitoring	Telematics	Telematics
Joystick Control	Auto Drive or Manual Control	Auto Drive or Manual Control
Hydraulic Bag Pan	Yes	Yes
Tine Caps	Yes	Yes
Crane Control	Wireless	Wireless
Hydraulic Lift Jacks	4	4
LED Flood Lighting	Yes	Yes
CAB FEATURES		
Pressurized Cabin	Yes	Yes
Heated/Air Conditioned	Yes	Yes
Heated Seats	Yes	Yes
Bluetooth	Yes	Yes
Radio	Yes	Yes



	TRAILER										
MODEL	FT3072	FT3272	FT3472	FT3672	FT3872	FT4072	FT4272	FT4672	FT4872	FT5272	
DIMENSIONS											
Length (ft)	30	32	34	36	38	40	42	46	48	52	
Wall Height (ft)	5-8	5-8	5-8	5-8	5-8	5-8	5-8	5-8	5-8	5-8	
Interior Box Width (ft)	8	8	8	8	8	8	8	8	8	8	
Level Capacity- 6ft Walls (ft³)	1440	1536	1632	1728	1824	1920	2016	2304	2304	2496	
Heaped Capacity - 6ft Walls (ft³)	1680	1792	1904	2016	2128	2240	2352	2576	2688	2912	
Wall Extension Capacity (ft³)	2160	2304	2448	2592	2736	2880	3168	3312	3456	3744	
Box Construction	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	
STANDARD FEATURES											
Suspension	Air	Air	Air	Air	Air	Air	Air	Air	Air	Air	
Axle Count	2	2	2	2	2	2-4	2-3	2-4	2-4	2-4	
Tire Size	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	
Tire Options	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Tailgate Options	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	
Hitch Type	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	
Decal Package	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	
Wheels	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	
APRON/FLOOR											
Floor Chain	WR78	WR78	WR78	WR78	WR78	WR78	WR78	WR78	WR79	WR78	
Floor Drive	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual	
Planetary Drive	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	
MECHANICAL											
Brakes	Air	Air	Air	Air	Air	Air	Air	Air	Air	Air	
Lift Axle	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	
Steering Axle(s)	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	
Rear Drive Shaft Diameter (in)	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	
OPTIONAL UPGRADES											
Grain Hopper	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	
Front Fold Down Bulkhead	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	
Working Lights	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	
Manual & Electric Tarp System	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	





FORAGE BOX	TRUCK MOUNT					
	MODEL	FBT2072	FBT2272	FBT2472	FBT2672	FBT2872
	DIMENSIONS					
	Length (ft)	20	22	24	26	28
	Wall Height (ft)	5-8	5-8	5-8	5-8	5-8
	Interior Box Width (ft)	8	8	8	8	8
	Cab To Axle Measurement (In)	150	170	187	204	221
	Level Capacity- 6ft Walls (ft³)	960	1056	1152	1248	1344
	Heaped Capacity - 6ft Walls (ft³)	1120	1232	1344	1456	1568
	Wall Extension Capacity (ft³)	1440	1584	1728	1872	2016
	Box Construction	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge
STANDARD FEATURES						
Suspension	N/A	N/A	N/A	N/A	N/A	N/A
Axle Count	N/A	N/A	N/A	N/A	N/A	N/A
Tire Size	N/A	N/A	N/A	N/A	N/A	N/A
Tire Options	N/A	N/A	N/A	N/A	N/A	N/A
Tailgate Options	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard
Hitch Type	N/A	N/A	N/A	N/A	N/A	N/A
Decal Package	Basic	Basic	Basic	Basic	Basic	Basic
APRON/FLOOR						
Floor Chain	88K or WR78	88K or WR78	88K or WR78	88K or WR78	88K or WR78	88K or WR78
Floor Drive	Single	Single	Dual	Dual	Dual	Dual
Planetary Drive	Optional	Optional	Optional	Optional	Optional	Optional
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
MECHANICAL						
Brakes	N/A	N/A	N/A	N/A	N/A	N/A
Steering Axle(s)	N/A	N/A	N/A	N/A	N/A	N/A
Rear Drive Shaft Diameter (in)	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16
OPTIONAL UPGRADES						
Front Fold Down	Optional	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional
Working Lights	Optional	Optional	Optional	Optional	Optional	Optional
Manual & Electric Tarp System	Optional	Optional	Optional	Optional	Optional	Optional

FORAGE BOX

	PULL TYPE					
MODEL	FB2072-23	FB2272-23	FB2472-23	FB2672-23	FB3072-36	FB3472-36
DIMENSIONS						
Length (ft)	20	22	24	26	30	34
Wall Height (ft)	5-8	5-8	5-8	5-8	5-8	5-8
Interior Box Width (ft)	8	8	8	8	8	8
Cab To Axle Measurement (In)	N/A	N/A	N/A	N/A	N/A	N/A
Level Capacity- 6ft Walls (ft³)	960	1056	1152	1248	1440	1632
Heaped Capacity - 6ft Walls (ft³)	1120	1232	1344	1456	1680	1904
Wall Extension Capacity (ft³)	1440	1584	1728	1872	2160	2448
Box Construction	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge
STANDARD FEATURES						
Suspension	Spring	Spring	Spring	Spring	Spring	Spring
Axle Count	Tandem	Tandem	Tandem	Tandem	Tandem	Tridem
Tire Size	560/45R-22.5	560/45R-22.5	560/45R-22.5	560/45R-22.5	560/45R-22.5	560/45R-22.5
Tire Options	Yes	Yes	Yes	Yes	Yes	Yes
Tailgate Options	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard
Hitch Type	Standard	Standard	Standard	Standard	Standard	Standard
Decal Package	Basic	Basic	Basic	Basic	Basic	Basic
APRON/FLOOR						
Floor Chain	88K or WR78	88K or WR78	88K or WR78	88K or WR78	88K or WR78	88K or WR78
Floor Drive	Single	Single	Dual	Dual	Dual	Dual
Planetary Drive	Optional	Optional	Optional	Optional	Optional	Optional
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
MECHANICAL						
Brakes	Optional	Optional	Optional	Optional	Optional	Optional
Steering Axle(s)	Optional	Optional	Optional	Optional	Standard	Standard
Rear Drive Shaft Diameter (in)	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16	2 3/16 - 2 7/16
OPTIONAL UPGRADES						
Front Fold Down	Optional	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional
Working Lights	Optional	Optional	Optional	Optional	Optional	Optional
Manual & Electric Tarp System	Optional	Optional	Optional	Optional	Optional	Optional



COMBINATION TRAILER	PULL TYPE				
	MODEL	CT3048	CT3248	CT3448	CT3648
	DIMENSIONS				
	Length (ft)	30	32	34	36
	Wall Height - Forage (ft)	5-8	5-8	5-8	5-8
	Wall Height - Manure (ft)	4	4	4	4
	Interior Box Width (ft/in)	7'4"	7'4"	7'4"	7'4"
	Level Capacity - Forage (ft³)	1125	1920	2040	2400
	Level Capacity - Manure (ft³)	900	960	1020	1080
	Heaped Capacity - Forage (ft³)	2025	2160	2295	2430
STANDARD FEATURES					
Suspension	Air	Air	Air	Air	Air
Axle Count	Tandem	Tandem	Tandem	Tandem/Tridem	Tandem/Tridem
Tire Size	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5
Tire Options	Yes	Yes	Yes	Yes	Yes
Tailgate Options	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door
Bulkhead	Standard	Standard	Standard	Standard	Standard
Decal Package	Premium	Premium	Premium	Premium	Premium
Wheels	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum
APRON/FLOOR					
Floor Chain	WR78 or Long-Link	WR78 or Long-Link	WR78 or Long-Link	WR78 or Long-Link	WR78 or Long-Link
Floor Drive	Single	Single	Dual	Dual	Dual
Planetary Drive	Standard	Standard	Standard	Standard	Standard
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes
Sprockets	Yes	Yes	Yes	Yes	Yes
Rear Shaft Diameter (in)	2 - 7/16	2 - 7/16	2 - 7/16	2 - 7/16	2 - 7/16
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS					
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes
MECHANICAL					
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Brakes	Air	Air	Air	Air	Air
Steering Axle(s)	Optional	Optional	Optional	Optional	Optional
Lift Axle	Optional	Optional	Optional	Optional	Optional
Rear Drive Shaft Diameter (in)	2 7/16	2 7/16	2 7/16	2 7/16	2 7/16
OPTIONAL UPGRADES					
Front Fold Down	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional
Working Lights	Optional	Optional	Optional	Optional	Optional
Manual & Electric Tarp System	Optional	Optional	Optional	Optional	Optional

D-SERIES DUMP WAGON	PULL TYPE				
	MODEL	DWXB2158-34	DWXB2658-34	DWXB2658-48	DWXB3058-48
	DIMENSIONS				
	Overall Length (in)	347"	405"	405"	457"
	Overall Width W/Tires (in)	130"	130"	130"	130"
	Extension Height (in)	30"	30"	30"	30"
	Wall Height (in)	58"	58"	58"	58"
	Silage Capacity	23.15 t /46,300 lbs	28.6 t / 57,200 lbs	28.6 t / 57,200 lbs	30.0 t / 65,900 lbs
	Capacity with Extensions	41.3 m^3 /1548.5 ft^3	52.1 m^3 / 1836 ft^3	52.1 m^3 / 1836 ft^3	59.2 m^3 / 2090 ft^3
	Box Construction	3/16"	3/16"	3/16"	3/16"
STANDARD FEATURES					
Steering	Yes	Yes	Yes	Yes	Yes
Suspension	Tandem	Tandem	Tridem	Tridem	Quadrem
Tire Options	Yes	Yes	Yes	Yes	Yes
Decal Package	Premium	Premium	Premium	Premium	Premium
MECHANICAL					
Front Extension	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated
Tailgate – Hydraulic Actuated Tailgate Hydraulic Lift w/2 Stage Grain Door	Yes	Yes	Yes	Yes	Yes
Jack	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic

BEDDING FLINGER	PULL TYPE			
	MODEL	BF1048	BF1248	BF1460
	DIMENSIONS			
	Length (ft)	10	12	14
	Wall Height (ft)	4	4	5
	Top Opening Width (in)	66	66	73
	Capacity (lbs)	18,920	22,704	35,112
	Volume (yds)	6.5	7.8	12
	Hub Spindle Cap (lbs)	20,000	20,000	40,000
	Box Construction	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES				
Axle Count	Single	Single	Tandem	Tandem
Suspension	Spring	Spring	Spring	Spring
Tire Size	285/65R22.5	285/65R22.5	285/65R22.5	285/65R22.5
Hub Spindle Cap (lbs)	20,000	20,000	40,000	40,000
Decal Package	Basic	Basic	Basic	Basic
MECHANICAL				
Tilt Conveyor	Yes	Yes	Yes	Yes
In Cab Controller	Yes	Yes	Yes	Yes
Bi-Directional Belt Function	Yes	Yes	Yes	Yes
ADD ONS				
Working Lights	Yes	Yes	Yes	Yes
Truck Mount Compatible	Yes	Yes	Yes	Yes



# UNRIVALED DEALER SUPPORT

With a dealer network spanning across North America, we're committed to providing the right tools and education to our dealer partners. From a seamless machine purchase to unprecedented technical post-sale support, JBS customers are investing in much more than just a piece of agricultural equipment. We stand behind our machines and the people who sell them.

If you're looking for a dealer near you, please reach out and we'll put you in touch:

Call us: **+1 604 826 5391**

Email us: **dealers@jbsequipment.com**



+1 604 826 5391  
jbsequipment.com

©JBS® Equipment 2021



*"JBS Equipment continues to be an excellent partner for us. The customers that have purchased spreaders from us have been pleased with the product performance and JBS' support. Our team can depend on them when servicing their products, keeping them running in the field."*

**Scott Raber**  
Titan Machinery  
Fremont, Nebraska

JBS and its respective logo, "Bedding Flinger", "Low-Rider", "Track-Pack", "E-Series", "M-Series", "D-Series", "Float-Maxx", and "The field's the limit" are trademarks of JBS Equipment and may not be used without permission. This catalog was produced in 2021 and is correct at the time of printing. This content may be subject to change.





+1 604 826 5391  
[jbsequipment.com](http://jbsequipment.com)