



**JBS<sup>®</sup> EQUIPMENT**

The field's the limit





# SMARTER EQUIPMENT FASTER FIELDWORK





# JBS EQUIPMENT IS MOTIVATED BY PRIDE

The pride of our team is in the work they do. The pride of our dealers who sell JBS® machines. And the pride of farmers and agricultural professionals like you who know you can rely on JBS to help put food on the table - whether that's your family's table or the table of someone halfway across the continent. You do important work, which means that we do important work in supporting you.

Knowing the importance of agriculture helps us to never let up. Every day, we're in the field listening to our dealers and customers. Every day, we come into the shop knowing that design matters and that hidden welds are just as vital as the welds you see.

Every day, we support our customers with that same sense of urgency and human connection we've had since day one. That's who we will always strive to be. Because when you do important work, it's easy to be proud of what you do.



LOW-RIDER® SPREADER  
VMWB3042-50L

## CONTENTS

- 8 The JBS Equipment Process
- 12 Manure Spreaders
- 32 Track-Pack® Silage Bagger
- 38 Forage Trailers & Boxes
- 42 Dump Wagons
- 44 Bedding Flinger®
- 46 Machine Specs



**JBS EQUIPMENT**  
The field's the limit™



## A PROVEN LEADER IN MANURE SPREADER MANUFACTURING

Since 2005, we've made harvesting and spreading easier and more efficient for agricultural operations throughout North America. Every innovative and ultra-durable JBS machine is custom-engineered and built to the highest specifications in our state-of-the-art fabrication plant. As the recognized leader in manure spreader and silage bagger technology, we help you work faster and smarter.

"JBS has allowed me to be more productive, and spread more tonnes per hour. My customers love the output - we spread faster and more evenly. And farmers love that we're using high-flotation, high-capacity, reliable machines and prescriptive spreading to allow us to spread more accurately, keeping their fields healthier."

Jeff Richardson  
Richardson Manure Hauling  
Kearney, Nebraska



# A PROCESS WE BELIEVE IN

## PERFORMANCE DRIVEN

We design and manufacture the most technologically innovative spreaders, baggers, trailers, boxes, dump wagons, and flingers in the business.

Our technology delivers the highest performance and the highest quality. But don't take our word for it.

Talk to agricultural industry professionals and satisfied farmers who own a JBS machine and the dealers who stand by us.

## TRIED & TESTED

We know we can't change the weather, but we can leave you with one less thing to worry about in the field.

Meticulously engineered to perform in even the most rugged and unforgiving conditions, JBS machines offer industry-leading durability and reliability across any terrain.

## HIGHLY ENGINEERED

As a cutting-edge agricultural equipment manufacturer, we are development focused, relentlessly driving toward achieving industry-leading innovations.

We understand your unique challenges, and that knowledge informs every piece of technology we build. Our expert in-house R&D team designs products designed to exceed the highest technological standards.







## RESULTS FOCUSED

Our equipment is versatile, powerful and efficient, engineered to save you valuable time and effort in the field. Constantly innovating and improving based on your feedback, we create reliable, durable and innovative solutions for your unique challenges, helping make your work life easier and your agricultural operation more efficient and successful.

## SERVICE ORIENTED

We pride ourselves on 100% customer satisfaction and we back it up with the best service guarantees in the industry. Connected to our dedicated dealer network that spans the US and Canada, you're never far from support.

## EXPERT ASSEMBLY

We use revolutionary welding techniques and steel fabricating equipment at our 60,000ft<sup>2</sup> production facility to produce functional and durable machines. Everything from assembly and sandblasting to painting is done in-house by our team of experts. And we back every machine we build with a no-nonsense warranty.

## TRUSTED PARTNERS

We support and stand by our dealer partners, empowering them to go above and beyond for JBS customers. Just as we listen closely to our farmers to make improvements to JBS machines, we listen closely to our dealers to improve our processes, warranty programs, and customer support.





## EVERYTHING YOU NEED TO GET THE JOB DONE RIGHT

As a recognized industry leader in spreading technology, we offer a large range of quality crafted wide body, narrow body and truck mounted high-performance manure spreaders designed to meet the needs of your agricultural operation, no matter what size.

Built with ultra-durable components designed to withstand heavy use under even the harshest conditions, our spreaders are customizable and contain fully-welded, heavy-gauge steel that withstands the test of time.

Our rigorous field testing ensures that all components function perfectly and our spreaders perform the JBS way. For you, that means peace of mind knowing that you're working with the best in the business.

# MANURE SPREADERS



WIDE BODY SPREADER  
VMWB2648-34




# WIDE BODY SPREADER THE RIGHT TECHNOLOGY FOR THE MOST EFFICIENT FIELDWORK

Whether you operate a family farm or a large agricultural enterprise, JBS Wide Body Spreaders can handle all types of manure.

Among the largest in today's market, they come in tandem and tridem axle models, feature highly maneuverable suspensions, and boast carrying capacities between 46,000lbs and 100,000lbs.

With our optional bolt on silage kits they are workhorses during silage season and ideal for stockpiling manure in the off season. Able to spread all types of manure in all kinds of conditions, our equipment is built to handle any type of fieldwork you need done quickly and efficiently.

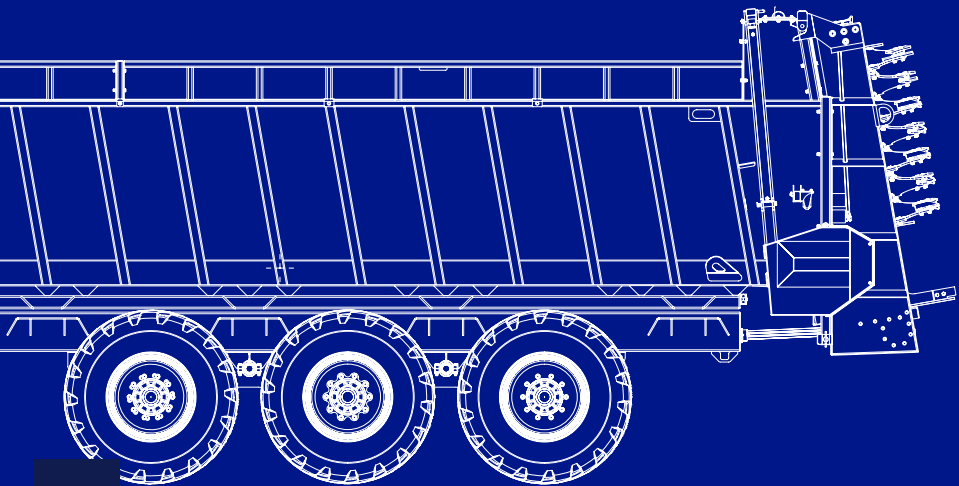

QUICK-ATTACH  
VERTIMAX VERTICAL  
BEATERS



HYDRAULIC  
GUILLOTINE GATE



UHMW LOW-FRICTION,  
HARD-WEARING  
PLASTIC FLOOR



LONG-LINK 5/8" GRADE  
100 FLOOR CHAIN



OFFICIAL PREMIUM  
DECAL PACKAGE

WIDE BODY SPREADER  
VMWB3448-48



LENGTH  
up to 34 ft

LEVEL CAPACITY  
up to 1006 ft<sup>3</sup>

HEAPED CAPACITY  
up to 1258 ft<sup>3</sup>

CARRYING CAPACITY  
up to 100,000 lbs

EMPTY WEIGHT  
up to 32,000 lbs



## OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Hardox® Beaters**  
A wear-resistant steel that extends the life of your JBS beaters.

**Silage Kit**  
Convert your Wide Body to a silage wagon.

**Scale & Rate Controller System**  
For improved spreading accuracy.

**Flight Protection System**  
Add extra protection for beater knives.



# FLOAT-MAXX SPREADER™ EFFORTLESSLY GLIDE ACROSS EVERY FIELD

Never worry about ground pressure in your fields again. The Float-Maxx Spreader offers the same great benefits of the Wide Body machine but with the lightest footprint of any comparable manure spreader on the market.

The JBS Float-Maxx has 8000 in<sup>2</sup> of ground contact per pair at all times and evenly spreads manure in virtually any environment, making it your best choice for low-compaction commercial spreading.

WIDE BODY



PRODUCES JUST 11 PSI  
OF GROUND PRESSURE



HUGE HEAPED  
CAPACITY OF 1500 FT<sup>3</sup>



INDUSTRY-LEADING  
CAMSO TRACK SYSTEM

FLOAT-MAXX SPREADER  
VMWB3042-55TR



8000IN<sup>2</sup> OF GROUND CONTACT AT ALL TIMES

LENGTH  
30 ft

LEVEL CAPACITY  
1175 ft<sup>3</sup>

HEAPED CAPACITY  
1500 ft<sup>3</sup>

CARRYING CAPACITY  
100,000 - 110,000 lbs

EMPTY WEIGHT  
33,000 lbs

SUSPENSION  
Camso Track System

GROUND PRESSURE  
11 PSI



## OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Hardox® Beaters**  
A wear-resistant steel that extends the life of your JBS beaters.

**Silage Kit**  
Convert your Wide Body to a silage wagon.

**Scale & Rate Controller System**  
For improved spreading accuracy.

**Flight Protection System**  
Add extra protection for beater knives.



LENGTH  
30 ft

LEVEL CAPACITY  
1100 ft<sup>3</sup>

HEAPED CAPACITY  
1450 ft<sup>3</sup>

CARRYING CAPACITY  
100,000 lbs

EMPTY WEIGHT  
35,000 lbs


SUSPENSION  
50 Tonne Hydraulic



LOW-RIDER® SPREADER  
VMWB3042-50L

# LOW-RIDER® SPREADER A STEP ABOVE THE REST

Delivering a smooth ride on even the toughest terrain, the Low-Rider® is our largest, most versatile spreader. Its low center of gravity and large tires combine with the optional JBS electronic steering system to provide on-field stability that your operation can count on.

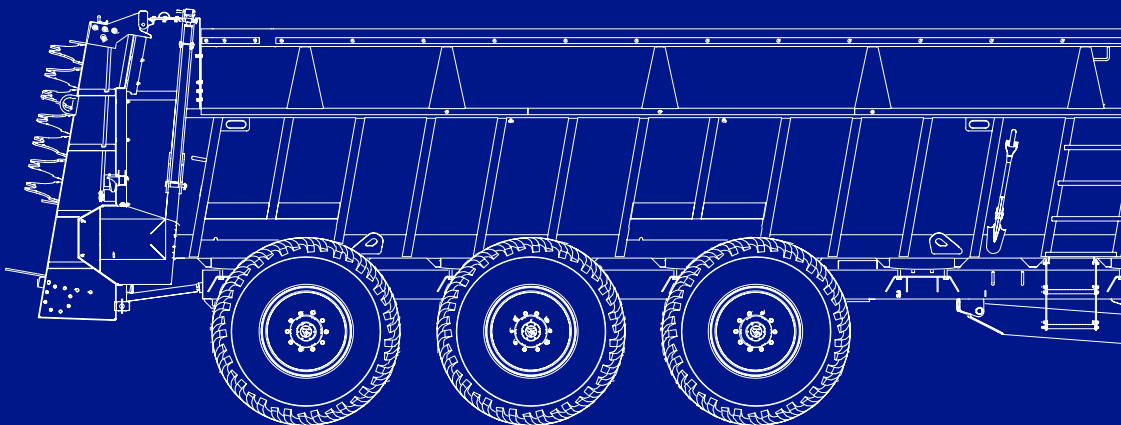

50-TON HYDRAULIC  
SUSPENSION WITH  
WEIGHT TRANSFER AXLE



MASSIVE HEAPED  
CAPACITY OF 1450 FT<sup>3</sup>



ULTIMATE STABILITY ON  
UNEVEN TERRAIN



TOUGH AND RELIABLE  
750-60R-30.5 TIRES



## OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Hardox® Beaters**  
A wear-resistant steel that extends the life of your JBS beaters.

**Silage Kit**  
Convert your Wide Body to a silage wagon.

**Scale & Rate Controller System**  
For improved spreading accuracy.


**Flight Protection System**  
Add extra protection for beater knives.

**Electronic Forced Steering System**  
Unbeatable maneuverability and flotation with the most advanced steering system on the market.



# E-SERIES™ SPREADER THE POWERFUL YET AFFORDABLE CHOICE

Whether you run a large agricultural operation or a family farm, you'll get maximum work done quickly with our #1 best-selling spreader. Featuring the same innovative technology and quality construction as our commercial models, the E-Series™ Spreader comes with an upgraded long-link floor chain, quick-attach Vertimax beaters and steel idler sprockets. A heavy-duty yet affordable machine, it comes in a variety of sizes and can be loaded with even your smallest equipment.

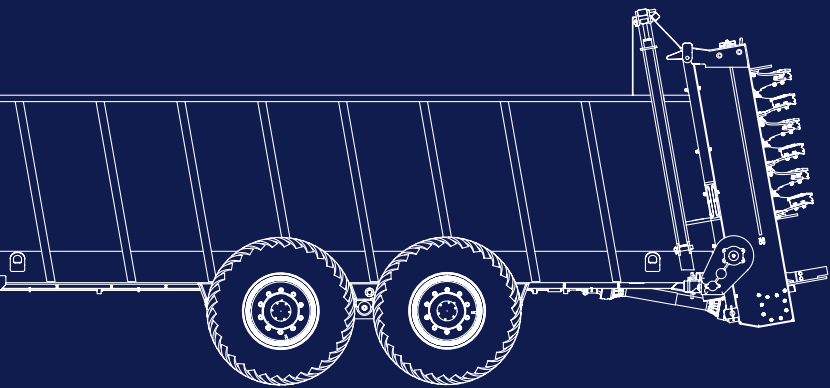

QUICK-ATTACH  
VERTIMAX VERTICAL  
BEATERS



HYDRAULIC  
GUILLOTINE GATE



LOW MAINTENANCE  
HYDRAULIC GEARBOX



UHMW LOW FRICTION,  
HARD-WEARING  
PLASTIC FLOOR



LONG-LINK 5/8" GRADE  
100 FLOOR CHAIN



- LENGTH  
up to 26 ft
- LEVEL CAPACITY  
up to 686 ft³
- HEAPED CAPACITY  
up to 858 ft³
- CARRYING CAPACITY  
up to 50,000 lbs
- EMPTY WEIGHT  
up to 21,500 lbs



## OPTIONAL UPGRADES

- Hurricane Beaters  
Consistent and accurate spreading for low applications of lightweight and fine materials.
- Scale & Rate Controller System  
For improved spreading accuracy.
- Flight Protection System  
Add extra protection for beater knives.

E-SERIES™ SPREADER  
VM2648



LENGTH  
16 ft

LEVEL CAPACITY  
257 ft<sup>3</sup>

HEAPED CAPACITY  
361 ft<sup>3</sup>

CARRYING CAPACITY  
18,400 lbs

EMPTY WEIGHT  
6720 lbs

M-SERIES™ SPREADER  
MISP1636-14



EXCEPTIONALLY LOW LOAD HEIGHT OF JUST 75"

# M-SERIES™ SPREADER SMALL ON SIZE, BIG ON WORKLOAD

JBS makes some of the industry’s favorite commercial spreaders, but we recognize that not everyone needs a commercial-sized spreader. Some farms need a spreader that’s more accessible, nimble, easier to store, and easier to tow. That’s why we worked hard to bring you the M-Series™ Spreader - with all the quality and features of every other JBS spreader, packed into an easier-to-operate format.

-  LOW-HORSEPOWER TRACTOR OPERATION  
75-130 HP
-  HYDRAULIC GUILLOTINE GATE
-  UHMW LOW-FRICTION, HARD-WEARING PLASTIC FLOOR
-  3/8" GRADE 100 FLOOR CHAIN





“Our customers love JBS Equipment. Not only are JBS machines up for the challenge of all Iowa's seasons and conditions, their machines are reliable, well-built, and priced competitively for the quality.”

Dan Koenen  
Post Equipment  
Rock Valley, Iowa



# TRUCK MOUNTED SPREADER SAFE ON THE ROAD, TOUGH IN THE FIELD

The most cost-effective solution for moving high volumes of manure, our Truck Mounted Spreader is suited for all types of applications, but especially fits the bill where substantial road travel is required. Built to travel safely on public roads – saving you time and money – it comes in both Narrow and Wide Body mounts, and can be easily converted for silage.

Available in

NARROW BODY

WIDE BODY



ALL WIDE OR NARROW  
BODY FEATURES



UHMW LOW FRICTION,  
HARD-WEARING  
PLASTIC FLOOR



SUPERIOR DIRECT  
DRIVE TO BEATERS



BASIC ECONOMIC OR  
HYDRAULIC PISTON  
PUMP CONTROLS



TRUCK MOUNTED SPREADER  
VMWBT2448

NARROW BODY  
LENGTH  
up to 26 ft

WIDE BODY  
LENGTH  
up to 26 ft

NARROW BODY  
HEAPED CAPACITY  
up to 845 ft<sup>3</sup>

WIDE BODY  
HEAPED CAPACITY  
up to 962 ft<sup>3</sup>



## OPTIONAL UPGRADES

Hurricane Beaters  
Consistent and accurate  
spreading for low applications of  
lightweight and fine materials.

Silage Kit (Wide Body Only)  
Convert your Wide Body to a  
silage wagon.

Scale & Rate Controller System  
For improved spreading accuracy.

Flight Protection System  
Add extra protection for  
beater knives.





QUICK-ATTACH  
VERTIMAX VERTICAL  
BEATERS



NARROW 6'6" BOX WIDTH



HYDRAULIC  
GUILLOTINE GATE



UHMW LOW-FRICTION,  
HARD-WEARING  
PLASTIC FLOOR



LONG-LINK 5/8" GRADE  
100 FLOOR CHAIN



OFFICIAL PREMIUM  
DECAL PACKAGE

LENGTH  
up to 30 ft

LEVEL CAPACITY  
up to 780 ft<sup>3</sup>


HEAPED CAPACITY  
up to 975 ft<sup>3</sup>

CARRYING CAPACITY  
up to 72,000 lbs

EMPTY WEIGHT  
up to 25,000 lbs



NARROW BODY SPREADER  
VM3048-36

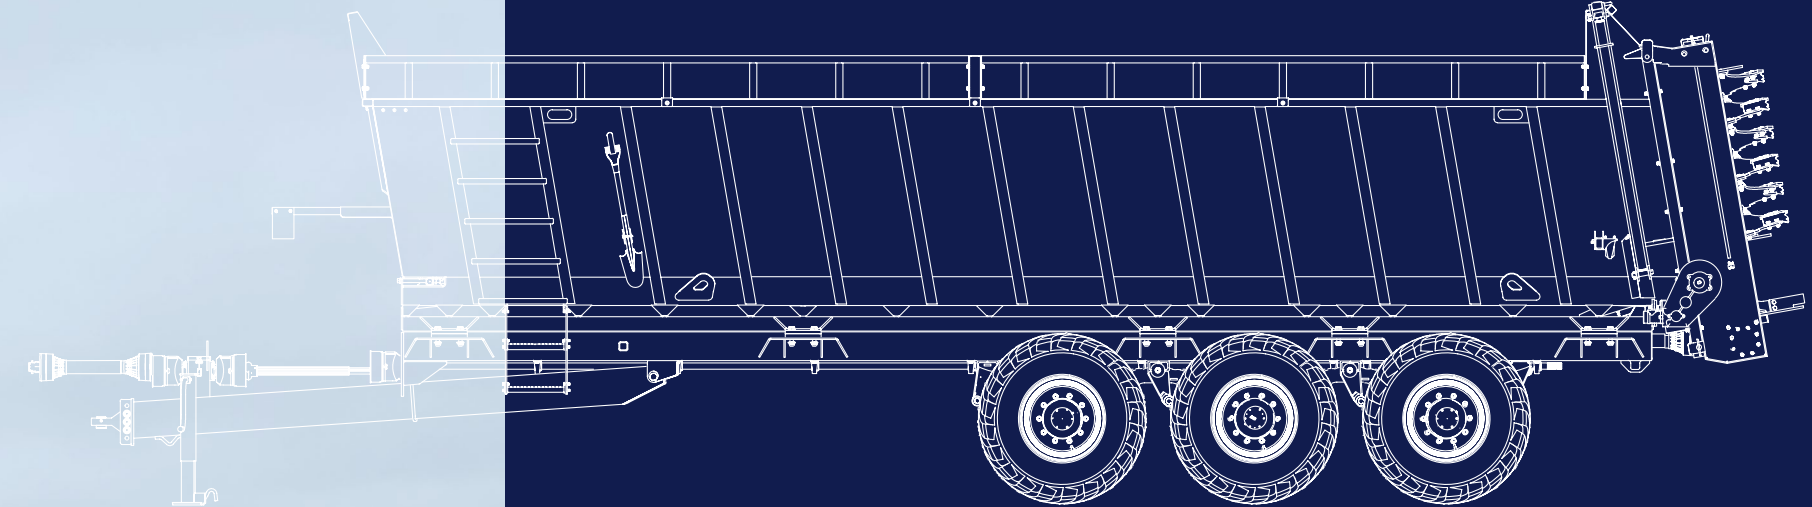

## NARROW BODY SPREADER ENGINEERED TO HANDLE EVEN THE SMALLEST SPACES



### OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate  
spreading for low applications of  
lightweight and fine materials.

**Scale & Rate Controller System**  
For improved spreading accuracy.

**Flight Protection System**  
Add extra protection for  
beater knives.

Get even the toughest jobs done faster and easier with our spreader designed to operate in more confined spaces like feedlots. Featuring the same innovative technology and durable fully-welded components as our Wide Body machines, the JBS Narrow Body Spreader doesn't compromise on field compaction or capacity. Thoroughly field-tested, it's guaranteed to function at the highest standards, like every machine we build.





# OPTIONAL UPGRADES

## HARDOX® BEATERS

A wear-resistant steel that extends the life of your JBS vertical beaters. Hardox® is hard through and through, from the surface deep down to its core, giving you extended service life and high productivity in the most challenging environments.

## SILAGE KIT

Put your JBS Spreader to work during harvest with a JBS Equipment customizable bolt on silage kit for your JBS Machine. Engineered to

## FLIGHT PROTECTION SYSTEM

Protection for beater knives to reduce impact and maintenance and increase lifespan.

## SCALE AND VARIABLE RATE CONTROL PACKAGES

Get more accurate insights. JBS offers a wide variety of scale and variable rate packages from basic weight display to full Variable Rate packages.

## HURRICANE BEATERS

Consistent and accurate spreading for low applications of lightweight and fine materials.

The JBS Hurricane Attachment is an optional spreading attachment for JBS Manure Spreaders. Available in both Narrow Body and Wide Body set-ups.

With an adjustable rear gate and stackable center plates, the JBS Hurricane Attachments allow for fine-tuning and accuracy on even the lowest-rated products.


From lime products to compost and litters, the JBS Hurricane Attachments will be sure to give you accurate and even spread coverages over your fields.

Standard on all JBS Equipment Attachments is our Quick Attach Beater System, this allows for quick and effortless changing of beaters systems so you can put your time where it counts.



## FEATURES

- Can spread as low as 2 tons to the acre.
- Ideal for lighter / low moisture materials.
- Adjustable rear gate.
- Spreads up to 65 feet wide.
- Hardox™ spinners.

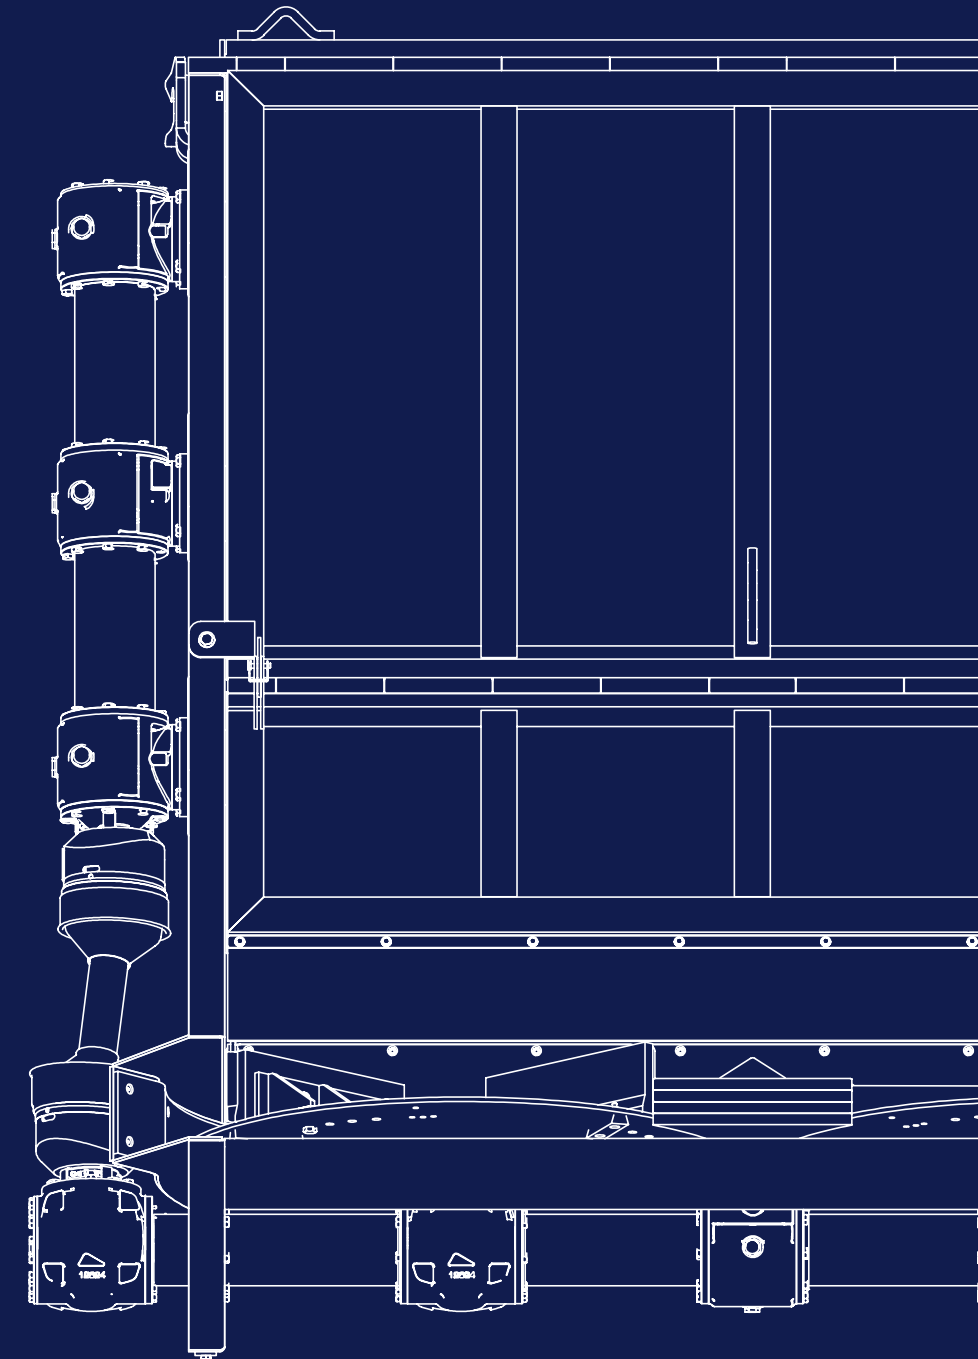






## REDUCED WASTE AND IMPROVED FEED QUALITY

Applying our proprietary cutting-edge technology to revolutionize the way silage baggers operate, this 100% hydraulically driven silage bagger has a Caterpillar C15 540hp Tier 4 power plant driving its state-of-the-art hydraulic system. Its solid rotor is driven hydraulically from both ends, by a rotary load sensing piston pump system, that is second-to-none. Removing the high-maintenance items such as belts, chains and gearboxes from the equation makes the JBS Track-Pack®

the most reliable machine in the field. Its hydraulically driven tracks and onboard computer system remove all need for cables, backstop or anchors, allowing for higher densities and better feed. High-flotation tracks with optional steel cleats allow you to keep moving where others can't.

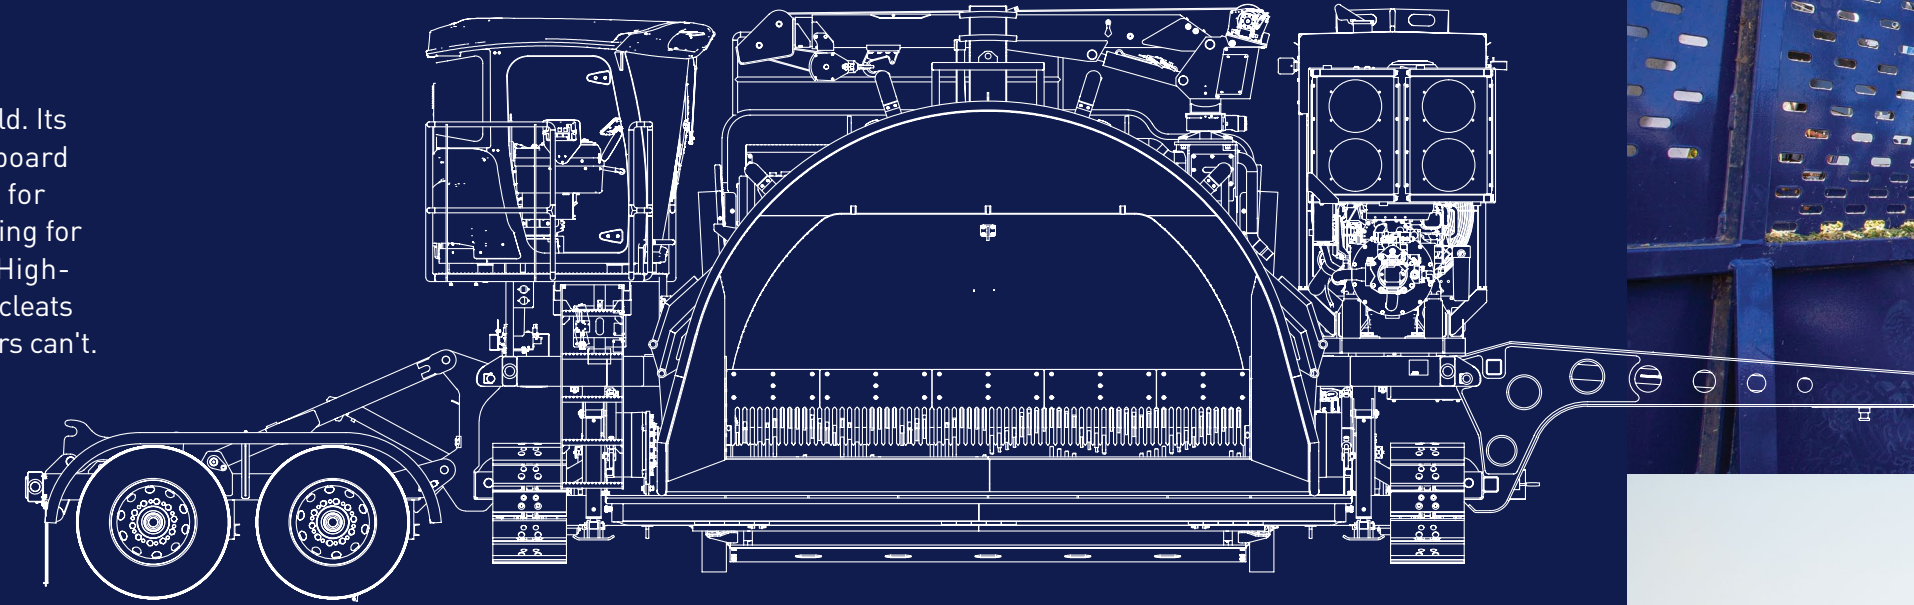

# TRACK-PACK® SILAGE BAGGER

**CAT**  
Power

Engineered with







STATE-OF-THE-ART 100%  
HYDRAULIC SYSTEM DRIVEN  
BY A CATERPILLAR C15.  
540HP TIER 4 POWER PLANT

5TH WHEEL HITCH



WIRELESS-  
CONTROLLED  
CRANE



SPACIOUS  
CAB



HEAT  
AND A/C



DUAL LCD  
MONITORING  
SYSTEM



AIR RIDE SEAT



TANDEM  
AXLE AIR RIDE  
SUSPENSION



WIDEST AND MOST  
DURABLE FEED TABLE  
IN THE INDUSTRY WITH  
OVERSIZED WHEELS

HYDRAULICALLY  
DRIVEN SOLID  
FEED ROTOR




# JBS TRACK-PACK<sup>®</sup> TECHNOLOGY THE ONLY TRACK-DRIVEN BAGGER IN THE WORLD

We know that unpredictable anchor-packed silage can pose issues for demanding farmers and operators, so our engineers created a better solution. Tracks on the Track-Pack Silage Bagger serve two purposes: they keep you moving steadily on difficult terrain, while packing your silage consistently.

This technology results in higher feed compaction. But what does this mean for your field? Track-Pack silage has an extended storage life and produces less waste, keeping your feed healthier for longer.

Engineered with

**JBS TRACK-PACK**

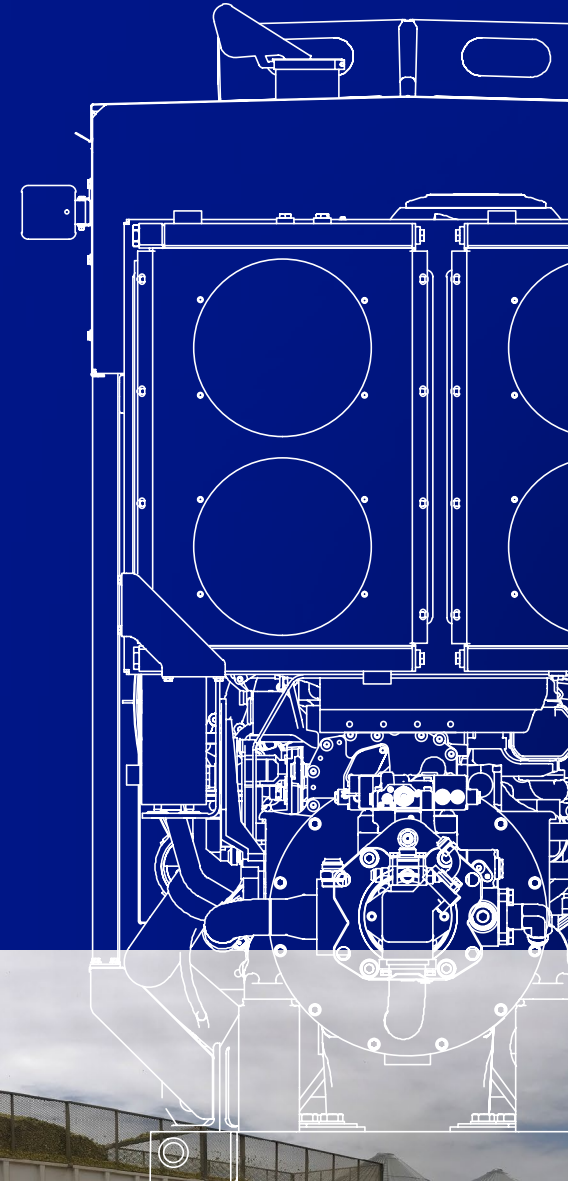


"We can always depend on JBS Equipment. The Silage Bagger has changed the way we handle feed. It utilizes the best available technology while being extremely simple to use. On top of that, their service is next to none."

Byron Slingerland  
Slingerland Feeders  
Lethbridge, Alberta





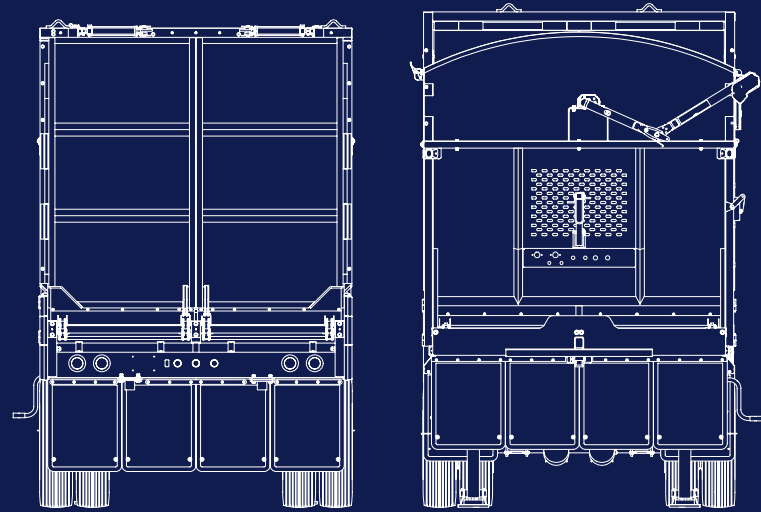

## FORAGE TRAILERS FOR QUICKER UNLOAD

Ruggedly built to withstand the test of time, JBS Forage Trailers come in a variety of lengths. They unload quickly and come standard with a manual swing door, with multiple optional door configurations.

LENGTH  
up to 52 ft

LEVEL CAPACITY  
up to 2496 ft<sup>3</sup>

HEAPED CAPACITY  
up to 2912 ft<sup>3</sup>

WALL EXT CAPACITY  
up to 3744 ft<sup>3</sup>

Available in

PULL-TYPE

# FORAGE TRAILERS



## FORAGE TRAILER 2.0 NEWLY REDESIGNED

The JBS Forage Trailer 2.0 are fully re-designed and customizable to meet your needs. Designed, engineered and built to the same exacting standards as our spreaders. JBS trailers and boxes offer the most flexibility and features to take on even the most challenging jobs..

LENGTH  
Up to 40 ft or custom lengths\*

\*For special sizes please consult with your local dealer.

HEAPED CAPACITY - 5ft WALLS  
up to 1920 ft<sup>3</sup>

HEAPED CAPACITY w/ 8ft WALLS  
up to 2880 ft<sup>3</sup>

Available in

PULL-TYPE





FORAGE BOX  
CT4048

# FORAGE BOXES RELIABLE FOR YEARS

JBS Forage Boxes feature heavy-duty construction and quality sandblasting, with primer and paint that lasts. These boxes also have manual swing doors in multiple configurations.

- LENGTH  
up to 34 ft
- LEVEL CAPACITY  
up to 1632 ft<sup>3</sup>
- HEAPED CAPACITY  
up to 1904 ft<sup>3</sup>
- WALL EXT CAPACITY  
up to 2448 ft<sup>3</sup>

Available in



TRUCK MOUNT

PULL-TYPE

# COMBINATION TRAILER THE ULTIMATE IN OPERATIONAL VERSATILITY

An industry leader, this fully welded heavy-duty trailer easily switches from a manure spreader to a forage trailer. Ideal for long hauls getting to the field, helping to reduce the amount of equipment you need. It comes standard with a Vertimax, with twin vertical augers and a hydraulic guillotine gate, spreads up to 55', and handles all manure types and other materials.

With the capacity of the JBS Combination Trailer, you'll never again need to stockpile spreadable manure in the field.

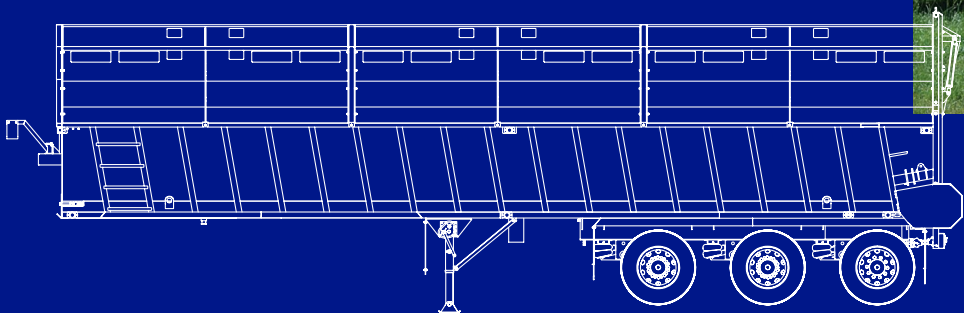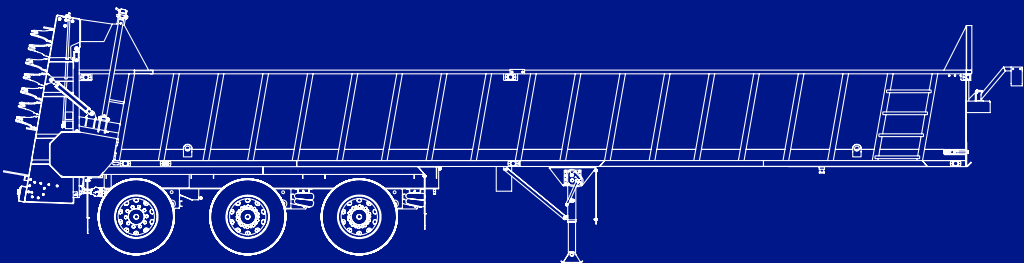

QUICK-ATTACH  
VERTIMAX VERTICAL  
BEATERS



HYDRAULIC  
GUILLOTINE GATE



UHMW LOW FRICTION,  
HARD-WEARING  
PLASTIC FLOOR



5/8" GRADE 100 FLOOR  
CHAIN (OPTIONAL)



STATE-OF-THE-ART  
HYDRAULIC DRIVE SYSTEM  
WITH IN CAB LCD MONITOR  
AND CONTROLS



4' SPREADER  
WALL HEIGHT

up to  
8' FORAGE  
WALL HEIGHT



- LENGTH  
up to 40ft
- LEVEL CAPACITY  
FORAGE  
up to 2400 ft<sup>3</sup>
- LEVEL CAPACITY  
MANURE  
up to 1200 ft<sup>3</sup>
- HEAPED CAPACITY  
FORAGE  
up to 2700 ft<sup>3</sup>
- HEAPED CAPACITY  
MANURE  
up to 1500 ft<sup>3</sup>

## OPTIONAL UPGRADES

**Hurricane Beaters**  
Consistent and accurate spreading for low applications of lightweight and fine materials.

**Hardox® Beaters**  
A wear-resistant steel that extends the life of your JBS beaters.

**Working Lights**  
Powerful illumination in the field.


**Manual & Electric Tarp System**  
Cover your commodities in transit.





## THE FASTEST DUMPING WAGON IN THE INDUSTRY.


Tandem, Tridem and Quadrem axle configurations available with a ton of added features and additional options.

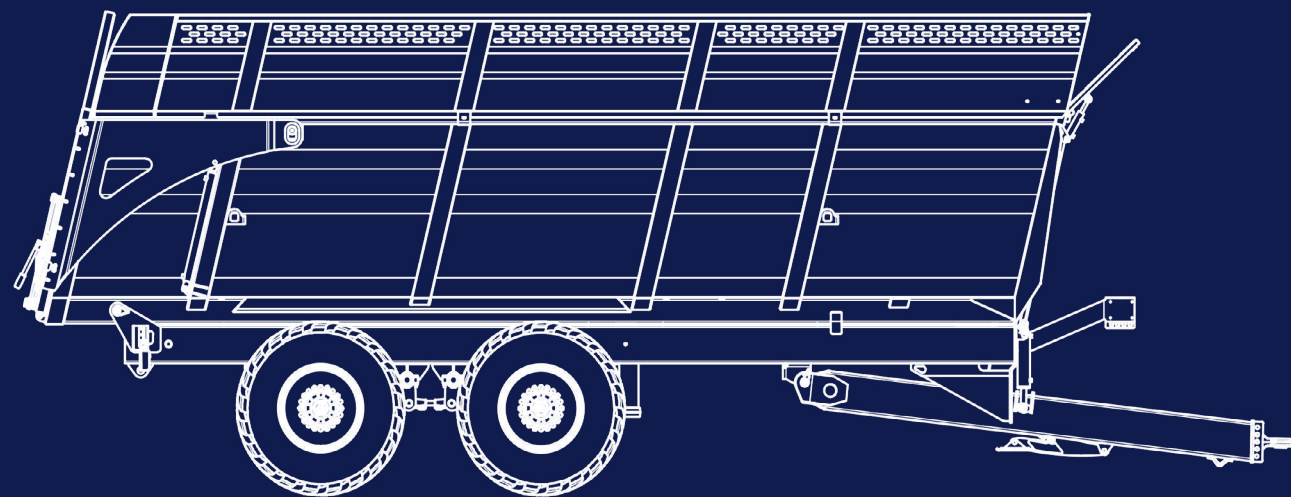

LENGTH  
up to 35 ft

SILAGE CAPACITY  
up to 77,000 lbs

SUSPENSION  
Tandem  
Tridem  
Quadrem

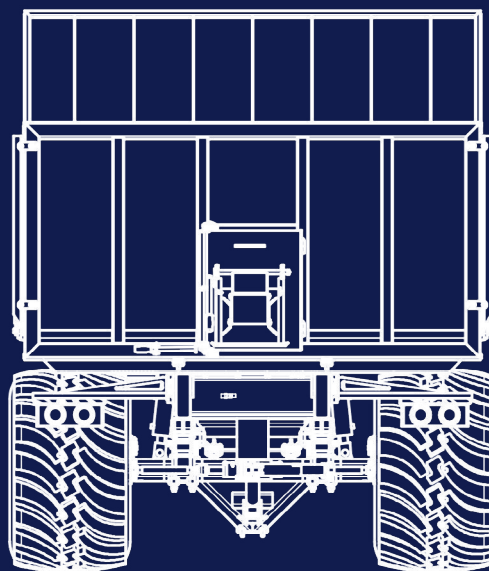


# D-SERIES™ DUMP WAGON

D-SERIES DUMP WAGON  
DWXB3558-64





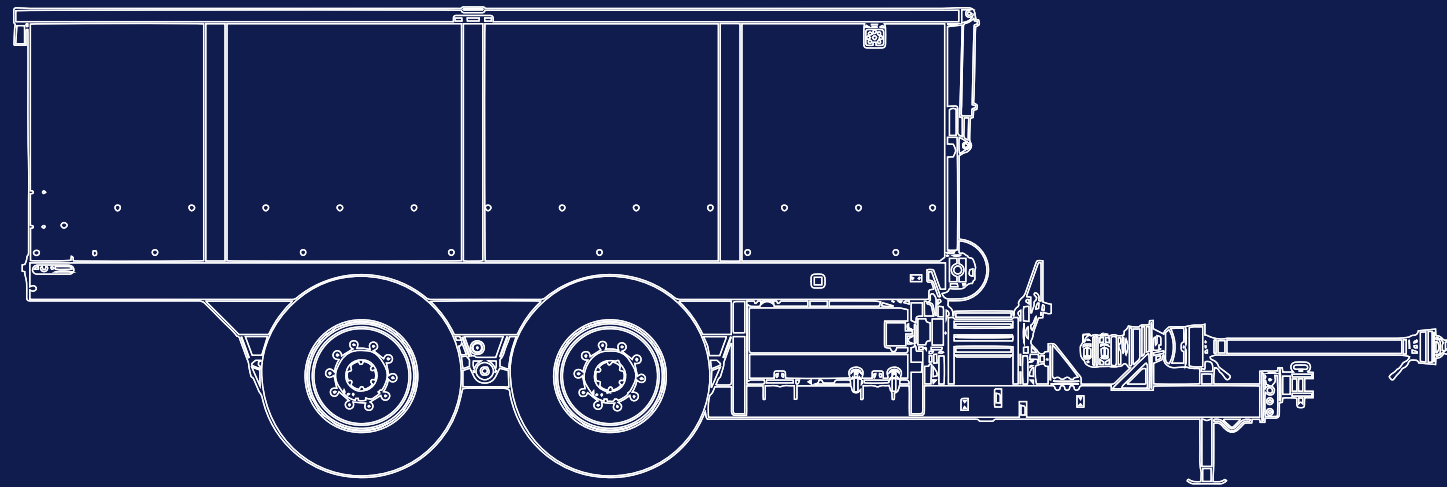


## POWERFUL YET FLEXIBLE PERFORMANCE

The JBS Bedding Flinger is available in a variety of lengths for different farm's needs. It can bed with sand, sawdust, or green bedding.

The Pull Type Bedding Flinger comes equipped with standard heavy duty 88K chain, hydraulic front door to meter sand flow and high-torque motor for increased power and reliability. The discharge HD conveyor is bi-directional.




# BEDDING FLINGER™

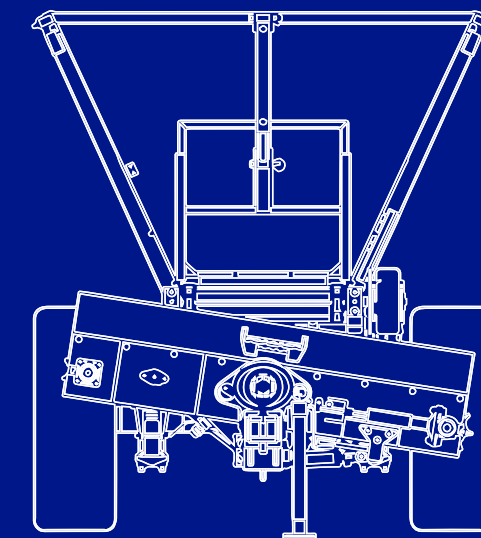

- ✓ UHMW Low Friction Hard Wearing Plastic Floor.
- ✓ Heavy Duty 88K Chain.
- ✓ Bi-Directional Belt Function.
- ✓ Tilt Conveyor.

Available in

Pull-Type

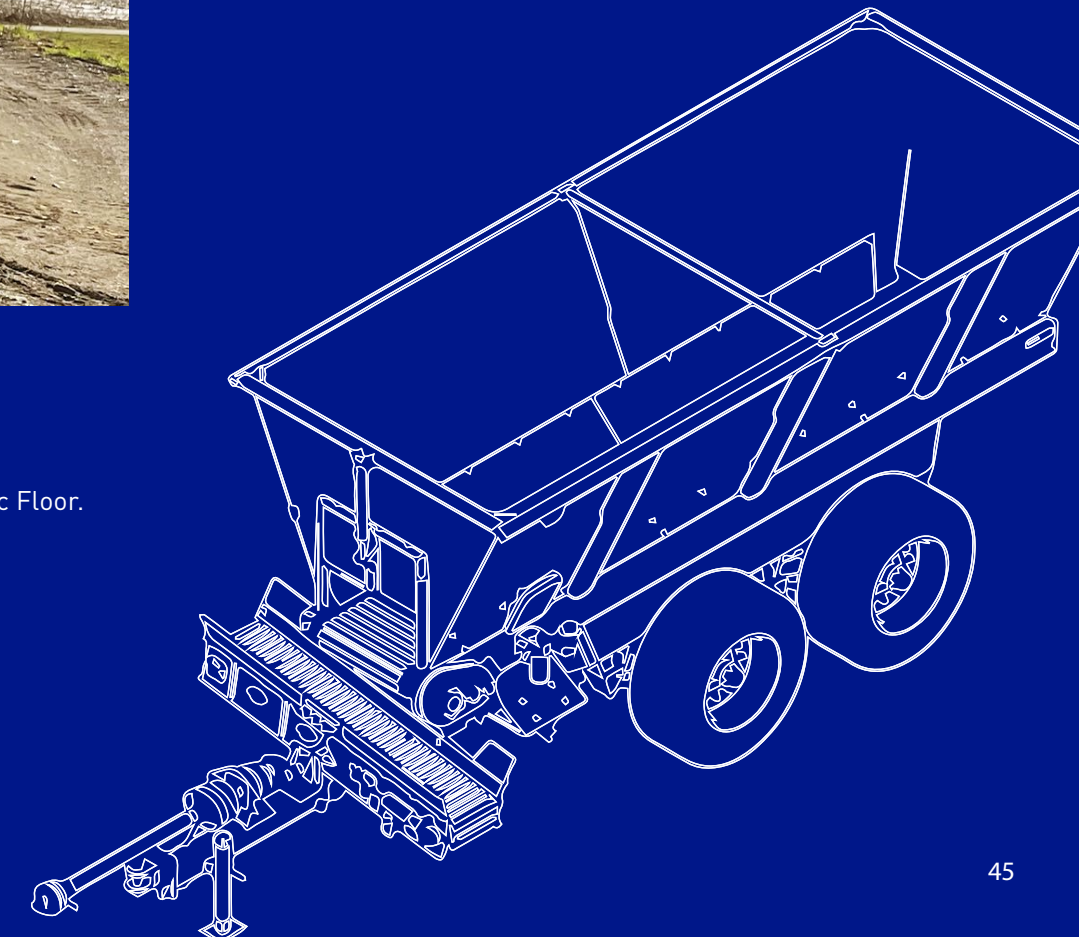



# MACHINE SPECS

D-SERIES DUMP WAGON  
DWXB3558-64







	PULL TYPE BASE MODEL						
MODEL	VMWB2448-23	VMWB2648-34	VMWB3048-36	VMWB3048-48	VMWB3048-50	VMWB3448-48	VMWB3448-50
DIMENSION							
Overall Length (in / m)	413" / 10.5m	437" / 11.1m	485" / 12.32m	534" / 13.56m	534" / 13.56m	582" / 14.78m	582" / 14.78m
Overall Height (in / m)	140" / 3.56m	145" / 3.68m	146" / 3.71m	146" / 3.71m	146" / 3.71m	167" / 4.24m	167" / 4.24m
Overall Width (in / m)	125" / 3.18m	125" / 3.18m	125" / 3.18m	125" / 3.18m	125" / 3.18m	125" / 3.18m	125" / 3.18m
Inside Box Width (in / m)	88" / 2.24m	88" / 2.24m	88" / 2.24m	88" / 2.24m	88" / 2.24m	88" / 2.24m	88" / 2.24m
Inside Box Length (in / m)	264" / 6.71	288" / 7.32m	336" / 8.53m	336" / 8.53m	336" / 8.53m	384" / 9.75m	384" / 9.75m
Load Height (in / m)	111" / 2.82	117" / 2.97m	114" / 2.9m	117" / 2.97m	119" / 3.02m	116" / 2.95m	119" / 3.02m
Level Capacity (ft³ / m³)	710ft³ / 20.1 m³	800ft³ / 22.7 m³	888ft³ / 25.2 m³	888 ft³/ 25.2 m³	888ft³ / 25.2 m³	1006ft³ / 28.5 m³	1006ft³ / 28.5 m³
Heaped Capacity (ft³ / m³)	888ft³ / 25.2 m³	975ft³ / 27.6 m³	1110ft³ / 31.4 m³	1110ft³ / 31.4 m³	1110ft³ / 31.4 m³	1258ft³ / 35.6 m³	1258ft³ / 35.6 m³
Carrying Capacity (lbs / kg)	46,000lbs / 20865kg	68,000lbs / 30844kg	72,000lbs / 32659kg	96,000lbs / 43545kg	100,000lbs / 45359kg	96,000lbs / 43545kg	100,000 lbs/ 45359kg
Empty Weight (lbs / kg)	24,500lbs / 12020kg	27,700lbs / 12564kg	23,500lbs / 10659kg	25,000lbs / 11340kg	26,500lbs / 12020kg	30,500lbs / 13835kg	32,000lbs / 14515kg
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES							
Suspension	Spring	Spring	Spring	Spring	Hydraulic	Spring	Hydraulic
Axle	Tandem	Tandem	Tridem	Tridem	Tridem	Tridem	Tridem
Tire Size	700/40-22.5	750/45R-26.5	700/40R-22.5	750/45R-26.5	750/45R-26.5	750/45R-26.5	750/45R-26.5
Tire Options	No	Yes	No	Yes	Yes	No	N/A
End Gate	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Hitch Type	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle
Decal Package	Premium	Premium	Premium	Premium	Premium	Premium	Premium
APRON/FLOOR							
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Floor Drive	Dual	Dual	Dual	Dual	Dual	Dual	Dual
Planetary Drive	Optional	Optional	Yes	Yes	Yes	Yes	Yes
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS							
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hardox® Beaters	Optional	Optional	Optional	Optional	Optional	Optional	Optional
MECHANICAL							
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Hydraulic Brakes	Optional	Optional	Optional	Yes	Yes	Yes	Yes
Steering Axle(s)	Optional	Optional	Optional	Yes	Yes	Yes	Yes
Rear Drive Shaft Diameter (in / mm)	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm	2 7/16" / 61.9mm	2 7/16" / 61.9mm	2 7/16" / 61.9mm	2 7/16" / 61.9mm
OPTIONAL UPGRADES							
Silage Kit	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Electronic Steering	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional	Optional	Optional	Optional



MODEL	VMWB3042-50TR
DIMENSION	
Overall Length (in / m)	534" / 13.56
Overall Height (in / m)	140" / 3.56
Overall Width (in / m)	126" / 3.2
Inside Box Width (in / m)	88" / 2.24
Inside Box Length (in / m)	336" / 8.53
Load Height (in / m)	105" / 2.67
Level Capacity (ft³ / m³)	1175 / 33.3
Heaped Capacity (ft³ / m³)	1500 / 42.5
Carrying Capacity (lbs / kg)	100,000 - 110,000 / 45 359 - 49 895
Empty Weight (lbs)	33,000 / 14 969
Box Construction	10 Gauge
STANDARD FEATURES	
Suspension	CAMSO Track System
Axle	Tracks
Tire Size	N/A
Tire Options	N/A
End Gate	Guillotine
Bulkhead	Standard
Hitch Type	Standard or Equal Angle
Decal Package	Premium
APRON/FLOOR	
Floor Chain	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes
Floor Drive	Dual
Planetary Drive	Yes
UHMW Plastic Floor	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings
BEATERS	
Vertimax Vertical Beaters	Yes
Hurricane Beaters	Optional
Quick Attach Beaters	Yes
Hardox® Beaters	Optional
MECHANICAL	
Beater Protection	Shear Bolt
Hydraulic Brakes	Yes
Steering Axle(s)	N/A
Rear Drive Shaft Diameter (in / mm)	2 7/16" / 61.9mm
OPTIONAL UPGRADES	
Silage Kit	Optional
Wall Extensions	Optional
Scale and Rate Controller Systems	Optional
Electronic Steering	Optional
Flight Protection System	Optional





PULL TYPE				
MODEL	VMWB2630-34L	VMWB3042-48L	VMWB3042-50L	VMWB3642-64L
DIMENSIONS				
Overall Length (in / m)	437" / 11.1m	486" / 12.34m	534" / 13.56m	555" / 14.1m
Overall Height (in / m)	146" / 3.63m	156" / 3.96m	153" / 3.89m	156" / 3.96m
Overall Width (in / m)	161" / 4.09m	161" / 4.09m	162" / 4.1m	161" / 4.09m
Inside Box Width (in / m)	82" / 2.1m	82" / 2.1m	82" / 2.1m	82" / 2.1m
Inside Box Length (in / m)	290" / 7.37m	336" / 8.53m	336" / 8.53m	408" / 10.36m
Load Height (in / m)	122" / 3.1m	132" / 3.35m	132" / 3.35m	136" / 3.45m
Level Capacity (ft³ / m³)	780ft³ / 22.1m³	1100ft³ / 31.2m³	1100 ft³ / 31.2m³	1410 ft³ / 41.1m³
Heaped Capacity (ft³ / m³)	918ft³ / 26m³	1260ft³ / 35.7m³	1450 ft³ / 41.1m³	1610 ft³ / 45.6m³
Carrying Capacity (lbs / kg)	68,000lbs / 30844kg	96,000lbs / 43545kg	100,000lbs / 45359kg	128,000lbs / 58060kg
Empty Weight (lbs / kg)	29,700lbs / 13472kg	37,300lbs / 17100kg	35,500lbs / 16103kg	41,600lbs / 18869kg
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES				
Suspension	Spring	Spring	Hydraulic	Spring
Axle	Tandem	Tridem	Tridem	Quad
Tire Size	750-60R-30.5	750-60R-30.5	750-60R-30.5	750-60R30.5
Tire Options	No	No	No	No
End Gate	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard
Hitch Type	Equal Angle	Equal Angle	Equal Angle	Equal Andle
Decal Package	Premium	Premium	Premium	Premium
APRON/FLOOR				
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes
Floor Drive	Dual	Dual	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS				
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes
Hardox® Beaters	Optional	Optional	Optional	Optional
MECHANICAL				
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Hydraulic Brakes	Yes	Yes	Yes	Yes
Steering Axle(s)	Yes	Yes	Yes	Yes
Rear Drive Shaft Diameter (in / mm)	2 7/16" / 61.9mm	2 7/16" / 61.9mm	2 7/16" / 61.9mm	2 7/16" / 61.9mm
OPTIONAL UPGRADES				
Silage Kit	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional



LOW-RIDER SPREADER  
VMWB3642-64L





	PULL TYPE						
MODEL	VMEC1636SA	VMEC1648	VMEC1848	VMEC2048	VMEC2248	VMEC2448	VMEC2648
DIMENSIONS							
Overall Length (in / m)	294" / 7.47m	296" / 7.52m	319" / 8.1m	337" / 8.56m	361" / 9.17m	385" / 9.78m	409" / 10.39m
Overall Height (in / m)	118" / 3m	118" / 3m	118" / 3m	122" / 3.1m	122" / 3.1m	122" / 3.1m	122" / 3.1m
Overall Width (in / m)	135" / 3.43m	132" / 3.35m	135" / 3.43m	135" / 3.43m	135" / 3.43m	135" / 3.43m	135" / 3.43
Inside Box Width (in / m)	78" / 1.98m	78" / 1.98m	78" / 1.98m	78" / 1.98m	78" / 1.98m	78" / 1.98m	78" / 1.98m
Inside Box Length (in / m)	168" / 4.27m	168" / 4.27m	192" / 4.88m	216" / 5.49m	240" / 6.1m	264" / 6.71m	288" / 7.32m
Load Height (in / m)	76" / 1.93m	89" / 2.26m	89" / 2.26m	91" / 2.31m	91" / 2.31m	91" / 2.31m	91" / 2.31m
Level Capacity (ft³ / m³)	317 ft³ / 9m³	369 ft³ / 10.5m³	421 ft³ / 11.9m³	473 ft³ / 13.4m³	525 ft³ / 15m³	577 ft³ / 16.3m³	629 ft³ / 17.8m³
Heaped Capacity (ft³ / m³)	425 ft³ / 12m³	454 ft³ / 12.8m³	517 ft³ / 14.6m³	581 ft³ / 16.5m³	645 ft³ / 18.3m³	706 ft³ / 20m³	769 ft³ / 21.7m³
Carrying Capacity (lbs / kg)	25,000 lbs/ 11340kg	50,000 lbs / 22680kg	50,000lbs / 22680kg	50,000lbs / 22680kg	50,000 / 22680kg	50,000lbs / 22680kg	50,000lbs/ 22680kg
Empty Weight (lbs / kg)	9000 / 4082kg	10,500 / 4763kg	12,500lbs / 5670kg	14,500lbs / 6577kg	16,500 / 7484kg	18,500lbs / 8391kg	21,500lbs / 9752kg
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES							
Suspension	Spring	Spring	Spring	Spring	Spring	Spring	Spring
Axle	Single	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Tire Size	560/45-22.5	560/45-22.5	560/45-22.5	600/50-22.5	600/50-22.5	600/50-22.5	600/50-22.5
Tire Options	Yes	Yes	Yes	Yes	Yes	Yes	Yes
End Gate	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Hitch Type	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Decal Package	Basic	Basic	Basic	Basic	Basic	Basic	Basic
APRON/FLOOR							
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Floor Drive	Single	Single	Single	Single	Dual	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS							
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hardox® Beaters	No	No	No	No	No	No	No
MECHANICAL							
Horse-power (HP) Requirements	110-150	125-150	140-175	160-200	175-225	185-220	200-275
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Hydraulic Brakes	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Steering Axle(s)	No	No	No	No	No	No	No
Rear Drive Shaft Diameter (in / mm)	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm
OPTIONAL UPGRADES							
Silage Kit	No	No	No	No	No	No	No
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional	Optional	Optional	Optional

The field's the limit



MODEL	MISP1636
DIMENSIONS	
Overall Length (in / m)	256" / 6.5m
Overall Height (in / m)	98" / 2.49m
Overall Width (in / m)	103" / 2.62m
Inside Box Width (in / m)	64" / 1.63m
Inside Box Length (in / m)	178" / 4.52m
Load Height (in / m)	75" / 1.1m
Level Capacity (ft³ / m³)	257 ft³ / 7.3 m³
Heaped Capacity (ft³ / m³)	361 ft³ / 10.2m³
Carrying Capacity (lbs / kg)	18,400lbs / 8346kg
Empty Weight (lbs / kg)	6,720 / 3048kg
Box Construction	10 Gauge
STANDARD FEATURES	
Suspension	Spring
Axle	Tandem
Tire Size	500/50-R17
Tire Options	No
End Gate	Guillotine
Bulkhead	Standard
Hitch Type	Standard
Decal Package	Basic
APRON/FLOOR	
Floor Chain	3/8" Grade 100
Removable Cross Slats	Yes
Floor Drive	Single
UHMW Plastic Floor	Yes
Sprockets	Steel Drive Sprocket; Nylon Idler
BEATERS	
Vertimax Vertical Beaters	Yes
Hurricane Beaters	No
Quick Attach Beaters	No
Hardox® Beaters	No
MECHANICAL	
Horse-power (HP) Requirements	90
Beater Protection	Shear Bolt
Hydraulic Brakes	No
Steering Axle(s)	No
Rear Drive Shaft Diameter (in / mm)	2" / 50.8mm
OPTIONAL UPGRADES	
Silage Kit	No
Wall Extensions	No
Scale and Rate Controller Systems	No
Flight Protection System	No





TRUCK MOUNTED MANURE SPREADER

	NARROW BODY				
MODEL	VMT1848	VMT2048	VMT2248	VMT2448	VMT2648
DIMENSIONS					
Overall Length (in / m)	252" / 6.4m	276" / 7.01m	300" / 7.62m	324" / 8.23m	348" / 8.84m
Overall Height (in / m)	92" / 2.34m	92" / 2.34m	92" / 2.34m	92" / 2.34m	92" / 2.34m
Overall Width (in / m)	100" / 2.54m	100" / 2.54m	100" / 2.54m	100" / 2.54m	100" / 2.54m
Inside Box Width (in / m)	78" / 1.98m	78" / 1.98m	78" / 1.98m	78" / 1.98m	78" / 1.98m
Inside Box Length (in / m)	192" / 4.88m	216" / 5.49m	240" / 6.1m	264" / 6.7m	288" / 7.3m
Load Height (in)	N/A	N/A	N/A	N/A	N/A
Level Capacity (ft³ / m³)	468 ft³ / 13.3 m³	520 ft³ / 14.7 m³	572 ft³ / 16.2 m³	624 ft³ / 17.7 m³	676 ft³ / 19.1 m³
Heaped Capacity (ft³ / m³)	585 ft³ / 16.5 m³	650 ft³ / 18.4 m³	715 ft³ / 20.2 m³	780 ft³ / 22.1 m³	845 ft³ / 23.9 m³
Carrying Capacity (lbs)	N/A	N/A	N/A	N/A	N/A
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES					
End Gate	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard	Standard
Decal Package	Basic	Basic	Basic	Basic	Basic
Fenders with Mud Flaps	Yes	Yes	Yes	Yes	Yes
Fold Away Lights	Yes	Yes	Yes	Yes	Yes
APRON/FLOOR					
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes	Yes
Floor Drive	Single	Single	Single	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS					
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes
Hardox® Beaters	No	No	No	No	No
MECHANICAL					
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Rear Drive Shaft Diameter (in / mm)	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm	2 7/16" / 61.9mm	2 7/16" / 61.9mm
Controls	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic
OPTIONAL UPGRADES					
Silage Kit	No	No	No	No	No
Wall Extensions	Optional	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional	Optional



TRUCK MOUNTED MANURE SPREADER

	WIDE BODY				
MODEL	VMWBT1848	VMWBT2048	VMWBT2248	VMWBT2448	VMWBT2648
DIMENSIONS					
Overall Length (in / m)	264" / 6.71m	288" / 7.32m	312" / 7.92m	336" / 8.53m	360" / 9.14m
Overall Height (in / m)	92" / 2.34m	92" / 2.34m	92" / 2.34m	92" / 2.34m	92" / 2.34m
Overall Width (in / m)	102" / 2.59m	102" / 2.59m	102" / 2.59m	102" / 2.59m	102" / 2.59m
Inside Box Width (in / m)	88" / 2.24m	88" / 2.24m	88" / 2.24m	88" / 2.24m	88" / 2.24m
Inside Box Length (in / m)	192" / 4.88m	216" / 5.49m	240" / 6.1m	264" / 6.71m	288" / 7.32m
Load Height (in)	N/A	N/A	N/A	N/A	N/A
Level Capacity (ft³ / m³)	533 ft³ / 15.1 m³	592 ft³ / 16.7 m³	651 ft³ / 18.4 m³	710 ft³ / 20.1 m³	769 ft³ / 21.8 m³
Heaped Capacity (ft³ / m³)	666 ft³ / 18.9 m³	740 ft³ / 21 m³	814 ft³ / 23.1 m³	888 ft³ / 25.2 m³	962 ft³ / 27.2 m³
Carrying Capacity (lbs)	N/A	N/A	N/A	N/A	N/A
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES					
End Gate	Guillotine	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard	Standard
Decal Package	Premium	Premium	Premium	Premium	Premium
Fenders with Mud Flaps	Yes	Yes	Yes	Yes	Yes
Fold Away Lights	Yes	Yes	Yes	Yes	Yes
APRON/FLOOR					
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes	Yes
Floor Drive	Single	Single	Single	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS					
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes
Hardox® Beaters	No	No	No	No	No
MECHANICAL					
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Rear Drive Shaft Diameter (in / mm)	2 3/16" / 55mm	2 3/16" / 55mm	2 7/16" / 61.9mm	2 7/16" / 61.9mm	2 7/16" / 61.9mm
Controls	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic	Electric and Hydraulic
OPTIONAL UPGRADES					
Silage Kit	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional	Optional





	PULL TYPE			
MODEL	VM2248-23	VM2448-23	VM2648-23	VM3048-36
DIMENSIONS				
Overall Length (in / m)	381" / 9.68m	405" / 10.29m	429" / 10.9m	477" / 12.12m
Overall Height (in / m)	140" / 3.56m	140" / 3.56m	140" / 3.56m	140" / 3.56m
Overall Width (in / m)	107" / 2.72m	107" / 2.72m	107" / 2.72m	107" / 2.72m
Inside Box Width (in / m)	78" / 1.98m	78" / 1.98m	78" / 1.98m	78" / 1.98m
Inside Box Length (in / m)	240" / 6.1 m	264" / 6.71m	288" / 7.32m	338" / 8.52m
Load Height (in / m)	111" / 2.82 m	111" / 2.82 m	111" / 2.82 m	112" / 2.84 m
Level Capacity (ft³ / m³)	572 ft³ / 16.2 m³	624 ft³ / 17.7 m³	676 ft³ / 19.1 m³	780 ft³ / 22.1 m³
Heaped Capacity (ft³)	715 ft³ / 20.2 m³	780 ft³ / 22.1 m³	845 ft³ / 23.9 m³	975 ft³ / 27.6 m³
Carrying Capacity (lbs / kg)	46,000lbs / 20865kg	46,000lbs / 20865kg	46,000lbs / 2865kg	72,000lbs / 32659kg
Empty Weight (lbs / kg)	16,500lbs / 7848kg	17,500lbs / 7938kg	18,500lbs / 8391kg	25,000lbs / 11340kg
Box Construction	10 Gauge	10 Gauge	10 Gauge	10 Gauge
STANDARD FEATURES				
Suspension	Spring	Spring	Spring	Spring
Axle	Tandem	Tandem	Tandem	Tridem
Tire Size	550/45-22.5	550/45-22.5	700/40-22.5	700/40-22.5
Tire Options	Yes	Yes	No	No
End Gate	Guillotine	Guillotine	Guillotine	Guillotine
Bulkhead	Standard	Standard	Standard	Standard
Hitch Type	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle	Standard or Equal Angle
Decal Package	Premium	Premium	Premium	Premium
APRON/FLOOR				
Floor Chain	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100	Long-Link 5/8" Grade 100
Galvanized & Removable Cross Slats	Yes	Yes	Yes	Yes
Floor Drive	Single	Dual	Dual	Dual
UHMW Plastic Floor	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS				
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes
Hardox® Beaters	No	No	No	No
MECHANICAL				
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Hydraulic Brakes	Optional	Optional	Optional	Optional
Steering Axle(s)	Optional	Optional	Optional	Optional
Rear Drive Shaft Diameter (in / mm)	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm	2 3/16" / 55mm
OPTIONAL UPGRADES				
Silage Kit	No	No	No	No
Wall Extensions	Optional	Optional	Optional	Optional
Scale and Rate Controller Systems	Optional	Optional	Optional	Optional
Flight Protection System	Optional	Optional	Optional	Optional



FLOAT MAXX SPREADER  
VMWB3042-55TR





MODEL	SB1012	SB1214
DIMENSIONS		
Length (ft-in / m)	21'3" / 6.5m	22'5" / 6.8m
Height (ft-in / m)	12'5" / 3.8m	12'5" / 3.8m
Width (ft-in / m)	22'11" / 7m	24'2" / 7.4m
Tunnel Size (ft / m)	10' or 12' / 3.05m or 3.7m	12' or 14' / 3.7m or 4.3m
Feed Table Width (ft-in / m)	9'6" / 2.9m	9'6" / 2.9m
Rotor Packing Width (ft / m)	10' / 3.05m	10' or 12' / 3.05m or 3.7m
Tunnel Extension	Yes	Yes
Table Belt Width (ft-in / m)	8'6" / 2.6m	10'6" / 3.2m
Collapsible Table Wings	Yes	Yes
Beater Bars	2	2
BODY (TRANSPORT)		
Length (ft-in / m)	41'4" / 12.3m	42'7" / 13m
Height (ft-in / m)	13'5" / 4.1m	13.5" / 4.1m
Width (ft / m)	10' / 3.05m	10' / 3.05m
Weight (lbs / kg)	56,000lbs / 25401kg	64,000lbs / 29029kg
Ground Clearance (in / m)	12" / 0.31m	12" / 0.31m
BASE		
Hitch Type	5th Wheel or Pintel	5th Wheel or Pintel
Track Type	Steel Or Rubber Cleats	Steel Or Rubber Cleats
MECHANICAL		
Engine	CAT C9 415hp Tier IV Final w/Auto Reverse Fan	CAT C15 540hp Tier IV Final w/Auto Reverse Fan
Motor Type	Rotary Piston Hydraulic	Rotary Piston Hydraulic
Rotor	Solid	Solid
System Monitoring	Telematics	Telematics
Joystick Control	Auto Drive or Manual Control	Auto Drive or Manual Control
Hydraulic Bag Pan	Yes	Yes
Tine Caps	Yes	Yes
Crane Control	Wireless	Wireless
Hydraulic Lift Jacks	4	4
LED Flood Lighting	Yes	Yes
CAB FEATURES		
Pressurized Cabin	Yes	Yes
Heated/Air Conditioned	Yes	Yes
Heated Seats	Yes	Yes
Bluetooth	Yes	Yes
Radio	Yes	Yes



	TRAILER									
MODEL	FT3072	FT3272	FT3472	FT3672	FT3872	FT4072	FT4272	FT4672	FT4872	FT5272
DIMENSIONS										
Length (ft / m)	30' / 9.1m	32' / 9.75m	34' / 10.36m	36' / 10.97m	38' / 11.58m	40' / 12.19m	42' / 12.8m	46' / 14m	48' / 14.6m	52' / 15.8m
Wall Height (ft / m)	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m
Interior Box Width	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m
Level Capacity- 6ft Walls (ft³ / m³)	1440 ft³ / 40.8 m³	1536 ft³ / 43.4 m³	1632 ft³ / 46.2 m³	1728 ft³ / 48.9 m³	1824 ft³ / 51.6 m³	1920 ft³ / 54.4 m³	2016 ft³ / 57.1 m³	2304 ft³ / 65.2 m³	2304 ft³ / 65.2 m³	2496 ft³ / 70.7 m³
Heaped Capacity - 6ft Walls (ft³ / m³)	1680 ft³ / 47.6 m³	1792 ft³ / 50.7 m³	1904 ft³ / 54 m³	2016 ft³ / 57 m³	2128 ft³ / 60.2 m³	2240 ft³ / 63.4 m³	2352 ft³ / 66.6 m³	2576 ft³ / 72.9 m³	2688 ft³ / 76.2 m³	2912 ft³ / 82.5 m³
Wall Extension Capacity (ft³ / m³)	2160 ft³ / 61.2 m³	2304 ft³ / 65.2 m³	2448 ft³ / 69.3 m³	2592 ft³ / 73.4 m³	2736 ft³ / 77.5 m³	2880 ft³ / 81.6 m³	3168 ft³ / 89.7 m³	3312 ft³ / 93.8 m³	3456 ft³ / 97.9 m³	3744 ft³ / 106 m³
Box Construction	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge
STANDARD FEATURES										
Suspension	Air	Air	Air	Air	Air	Air	Air	Air	Air	Air
Axle Count	2	2	2	2	2	2-4	2-3	2-4	2-4	2-4
Tire Size	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5
Tire Options	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Tailgate Options	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Hitch Type	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel	5th Wheel
Decal Package	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic
Wheels	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum
APRON/FLOOR										
Floor Chain	WR78	WR78	WR78	WR78	WR78	WR78	WR78	WR78	WR79	WR78
Floor Drive	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual
Planetary Drive	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
MECHANICAL										
Brakes	Air	Air	Air	Air	Air	Air	Air	Air	Air	Air
Lift Axle	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Steering Axle(s)	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Rear Drive Shaft Diameter (in / mm)	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm	2 3/16" - 2 7/16" / 55m - 61.9mm
OPTIONAL UPGRADES										
Grain Hopper	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Front Fold Down Bulkhead	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Working Lights	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Manual & Electric Tarp System	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional



	TRAILER			
MODEL	FT3660	FT3860	FT4060	Custom Size*
DIMENSIONS				
Length (ft / m)	36' / 10.97m	38' / 11.58m	40' / 12.19m	
Wall Height (ft / m)	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	5-8" / 1.5-2.4m	
Interior Box Width (ft / m)	8' / 2.4m	8' / 2.4m	8' / 2.4m	
Heaped Capacity - 5ft Walls (ft³ / m³)	1728 ft³ / 48.9 m³	1824 ft³ / 51.6 m³	1920 ft³ / 54.4 m³	
Wall Extension Capacity (ft³ / m³)	2592 ft³ / 73.4 m³	2736 ft³ / 77.47 m³	2880 ft³ / 81.55 m³	
Box Construction	12 Gauge	12 Gauge	12 Gauge	
STANDARD FEATURES				
Suspension	Standard	Standard	Standard	
Axle Count	2-3	2-3	3	
Tire Size	11R22.5	11R22.5	11R22.5	
Tailgate- High Lift	Yes	Yes	Yes	
Hitch Type	5th Wheel	5th Wheel	5th Wheel	
Decal Package	Basic	Basic	Basic	
Steel Wheels	Steel	Steel	Steel	
APRON/FLOOR				
Floor Chain	WR78	WR78	WR78	
Floor Drive	Dual	Dual	Dual	
UHMW Plastic Floor	Yes	Yes	Yes	
Steel Idler Sprockets with Bronze Brushings	Yes	Yes	Yes	
MECHANICAL				
Brakes	Air	Air	Air	
Rear Drive Shaft Diameter (in / mm)	2 3/16" - 55m	2 3/16" - 55m	2 3/16" - 55m	
OPTIONAL UPGRADES				
HD Suspension (Air)	Optional	Optional	Optional	
Planetary Drive	Optional	Optional	Optional	
Front Fold Down Bulkhead	Optional	Optional	Optional	
Wall Extensions	Mesh/ Solid	Mesh/ Solid	Mesh/ Solid	
Working Lights	Optional	Optional	Optional	
Aluminum Wheels	Optional	Optional	Optional	
Tire Options	11R24.5	11R24.5	11R24.5	
Tailgate - Barn Door	Optional	Optional	Optional	





	TRUCK MOUNT				
MODEL	FBT2072	FBT2272	FBT2472	FBT2672	FBT2872
DIMENSIONS					
Length (ft / m)	20' / 6.1m	22' / 6.7m	24' / 7.3m	26' / 7.9m	28' / 8.5m
Wall Height (ft / m)	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m
Interior Box Width (ft / m)	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m
Cab To Axle Measurement (In / m)	N/A	N/A	N/A	N/A	N/A
Level Capacity- 6ft Walls (ft³ / m³)	960 ft³ / 27.2m³	1056 ft³ / 29.9m³	115 ft³ 2 / 32.6m³	1248 ft³ / 35.3m³	1344 ft³ / 38.1m³
Heaped Capacity - 6ft Walls (ft³ / m³)	1120ft³ / 31.7m³	1232ft³ / 34.9m³	1344ft³ / 35.1	1456ft³ / 41.2m³	1568ft³ / 44.4m³
Wall Extension Capacity (ft³ / m³)	1440ft³ / 40.8m³	1584ft³ / 44.9m³	1728ft³ / 48.9m³	1872ft³ / 53m³	2016ft³ / 57.1m³
Box Construction	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge
STANDARD FEATURES					
Suspension	N/A	N/A	N/A	N/A	N/A
Axle Count	N/A	N/A	N/A	N/A	N/A
Tire Size	N/A	N/A	N/A	N/A	N/A
Tire Options	N/A	N/A	N/A	N/A	N/A
Tailgate Options	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door
Bulkhead	Standard	Standard	Standard	Standard	Standard
Hitch Type	N/A	N/A	N/A	N/A	N/A
Decal Package	Basic	Basic	Basic	Basic	Basic
APRON/FLOOR					
Floor Chain	88K or WR78	88K or WR78	88K or WR78	88K or WR78	88K or WR78
Floor Drive	Single	Single	Dual	Dual	Dual
Planetary Drive	Optional	Optional	Optional	Optional	Optional
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
MECHANICAL					
Brakes	N/A	N/A	N/A	N/A	N/A
Steering Axle(s)	N/A	N/A	N/A	N/A	N/A
Rear Drive Shaft Diameter (in / mm)	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm
OPTIONAL UPGRADES					
Front Fold Down	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional
Working Lights	Optional	Optional	Optional	Optional	Optional



	PULL TYPE					
MODEL	FB2072-23	FB2272-23	FB2472-23	FB2672-23	FB3072-36	FB3472-36
DIMENSIONS						
Length (ft / m)	20' / 6.1m	22' / 6.7m	24' / 7.3m	26' / 7.9m	30' / 9.1m	34' / 10.4m
Wall Height (ft / m)	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m
Interior Box Width (ft / m)	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m	8' / 2.4m
Cab To Axle Measurement (In)	N/A	N/A	N/A	N/A	N/A	N/A
Level Capacity- 6ft Walls (ft³ / m³)	960 ft³ / 27.2 m³	1056 ft³ / 29.9 m³	1152 ft³ / 32.6 m³	1248 ft³ / 35.3 m³	1440 ft³ / 40.8 m³	1632 ft³ / 46.2 m³
Heaped Capacity - 6ft Walls (ft³ / m³)	1120 ft³ / 31.7 m³	1232 ft³ / 34.9 m³	1344 ft³ / 35.1 m³	1456 ft³ / 41.2 m³	1680 ft³ / 47.6 m³	1904 ft³ / 53.9 m³
Wall Extension Capacity (ft³ / m³)	1440 ft³ / 40.8 m³	1584 ft³ / 44.9 m³	1728 ft³ / 48.9 m³	1872 ft³ / 53 m³	2160 ft³ / 61.2 m³	2448 ft³ / 69.3 m³
Box Construction	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge	12 Gauge
STANDARD FEATURES						
Suspension	Spring	Spring	Spring	Spring	Spring	Spring
Axle Count	Tandem	Tandem	Tandem	Tandem	Tandem	Tridem
Tire Size	560/45R-22.5	560/45R-22.5	560/45R-22.5	560/45R-22.5	560/45R-22.5	560/45R-22.5
Tire Options	Yes	Yes	Yes	Yes	Yes	Yes
Tailgate Options	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door	Swing Or Barn Door
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard
Hitch Type	Standard	Standard	Standard	Standard	Standard	Standard
Decal Package	Basic	Basic	Basic	Basic	Basic	Basic
APRON/FLOOR						
Floor Chain	88K or WR78	88K or WR78	88K or WR78	88K or WR78	88K or WR78	88K or WR78
Floor Drive	Single	Single	Dual	Dual	Dual	Dual
Planetary Drive	Optional	Optional	Optional	Optional	Optional	Optional
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
MECHANICAL						
Brakes	Optional	Optional	Optional	Optional	Optional	Optional
Steering Axle(s)	Optional	Optional	Optional	Optional	Standard	Standard
Rear Drive Shaft Diameter (in / mm)	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm	2 3/16" - 2 7/16" / 55m -61.9mm
OPTIONAL UPGRADES						
Front Fold Down	Optional	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional
Working Lights	Optional	Optional	Optional	Optional	Optional	Optional
Manual & Electric Tarp System	Optional	Optional	Optional	Optional	Optional	Optional



COMBINATION TRAILER	PULL TYPE					
	MODEL	CT3048	CT3248	CT3448	CT3648	CT4048
	DIMENSIONS					
	Length (ft / m)	30' / 9.1m	32' / 9.8m	34' / 10.4m	36' / 11m	40' / 12.2m
	Wall Height - Forage (ft / m)	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m	5-8' / 1.5-2.4m
	Wall Height - Manure (ft / m)	4' / 1.2m	4' / 1.2m	4' / 1.2m	4' / 1.2m	4' / 1.2m
	Interior Box Width (in / m)	88" / 2.2m	88" / 2.2m	88" / 2.2m	88" / 2.2m	88" / 2.2m
	Level Capacity - Forage (ft³ / m³)	1125 ft³ / 31.9 m³	1920 ft³ / 54.4 m³	2040 ft³ / 57.8 m³	2160 ft³ / 61.2 m³	2400 ft³ / 68 m³
	Level Capacity - Manure (ft³ / m³)	900 ft³ / 25.5 m³	960 ft³ / 27.2 m³	1020 ft³ / 28.9 m³	1080 ft³ / 30.6 m³	1200 ft³ / 34 m³
	Heaped Capacity - Forage (ft³ / m³)	2025 ft³ / 57.3 m³	2160 ft³ / 61.2 m³	2295 ft³ / 65 m³	2430 ft³ / 68.8 m³	2700 ft³ / 76.5 m³
STANDARD FEATURES						
Suspension	Air	Air	Air	Air	Air	Air
Axle Count	Tandem	Tandem	Tandem	Tandem/Tridem	Tandem/Tridem	Tandem/Tridem
Tire Size	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5	11R22.5
Tire Options	Yes	Yes	Yes	Yes	Yes	Yes
Tailgate Options	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door	Swing or Barn Door
Bulkhead	Standard	Standard	Standard	Standard	Standard	Standard
Decal Package	Premium	Premium	Premium	Premium	Premium	Premium
Wheels	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum	Steel or Aluminum
APRON/FLOOR						
Floor Chain	WR78 or Long-Link	WR78 or Long-Link	WR78 or Long-Link	WR78 or Long-Link	WR78 or Long-Link	WR78 or Long-Link
Floor Drive	Single	Single	Dual	Dual	Dual	Dual
Planetary Drive	Standard	Standard	Standard	Standard	Standard	Standard
UHMW Plastic Floor	Yes	Yes	Yes	Yes	Yes	Yes
Sprockets	Yes	Yes	Yes	Yes	Yes	Yes
Rear Shaft Diameter (in / mm)	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm
Sprockets	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings	Steel Idler Sprocket with Bronze Brushings
BEATERS						
Vertimax Vertical Beaters	Yes	Yes	Yes	Yes	Yes	Yes
Hurricane Beaters	Optional	Optional	Optional	Optional	Optional	Optional
Quick Attach Beaters	Yes	Yes	Yes	Yes	Yes	Yes
MECHANICAL						
Beater Protection	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt	Shear Bolt
Brakes	Air	Air	Air	Air	Air	Air
Steering Axle(s)	Optional	Optional	Optional	Optional	Optional	Optional
Lift Axle	Optional	Optional	Optional	Optional	Optional	Optional
Rear Drive Shaft Diameter (in / mm)	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm	2 - 7/16" - 61.9mm
OPTIONAL UPGRADES						
Front Fold Down	Optional	Optional	Optional	Optional	Optional	Optional
Wall Extensions	Optional	Optional	Optional	Optional	Optional	Optional
Working Lights	Optional	Optional	Optional	Optional	Optional	Optional
Manual & Electric Tarp System	Optional	Optional	Optional	Optional	Optional	Optional

D-SERIES DUMP WAGON	PULL TYPE					
	MODEL	DWXB2158-34	DWXB2658-34	DWXB2658-48	DWXB3058-48	DWXB3558-64
	DIMENSIONS					
	Overall Length (in / m)	347" / 8.8m	405" / 10.29m	405" / 10.29m	457" / 11.61m	517" / 13.13m
	Overall Width with Tires (in / m)	130" / 3.3m	130" / 3.3m	130" / 3.3m	130" / 3.3m	130" / 3.3m
	Extension Height (in / m)	30" / 0.76m	30" / 0.76m	30" / 0.76m	30" / 0.76m	30" / 0.76m
	Wall Height (in / m)	58" / 1.47m	58" / 1.47m	58" / 1.47m	58" / 1.47m	58" / 1.47m
	Capacity with Extensions (ft³ / m³)	1548.5 ft³ / 41.3 m³	1836 ft³ / 52.1m³	1836 ft³ / 52 m³	2090 ft³ / 59.2m³	2472 ft³ / 70 m³
	Silage Capacity (US ton / lbs / kg)	23.15 US ton /46,300 lbs / 21001 kg	28.6 US ton / 57,200 lbs / 25946 kg	28.6 US ton / 57,200 lbs / 25946 kg	32.95 US ton/ 65,900 lbs / 29892kg	38.5 US ton / 77,000 lbs / 34927 kg
	Box Construction	3/16" / 4.8mm	3/16" / 4.8mm	3/16" / 4.8mm	3/16" / 4.8mm	3/16" / 4.8mm
STANDARD FEATURES						
Steering	Yes	Yes	Yes	Yes	Yes	Yes
Suspension	Tandem	Tandem	Tridem	Tridem	Quadrem	Quadrem
Tire Options	Yes	Yes	Yes	Yes	Yes	Yes
Decal Package	Premium	Premium	Premium	Premium	Premium	Premium
MECHANICAL						
Front Extension	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated	Hinged, Tilt Hydraulic Actuated
Tailgate – Hydraulic Actuated Tailgate Hydraulic Lift w/2 Stage Grain Door	Yes	Yes	Yes	Yes	Yes	Yes
Jack	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic

BEDDING FLINGER	PULL TYPE			
	PULL TYPE MODELS	BF1248	BF1448	BF1660
	DIMENSIONS			
	Overall Length (ft / m)	12' / 3.7m	14' / 4.3m	16' / 4.9m
	Wall Height (ft / m)	4' / 1.2m	4' / 1.2	5' / 1.5m
	Top Opening Width (in / m)	73.5" / 1.9m	73.5" / 1.9m	80 / 2.03m
	Capacity (lbs / kg)	20,000lbs / 9071kg	40,000lbs / 18144kg	40,000lbs / 18144kg
	Volume (yd³ / m³)	8.3yd³ / 6.3m³	9.6yd³ / 7.34m³	13.5yd³ / 10.32m³
	Box Construction	10 Gauge	10 Gauge	10 Gauge
	STANDARD FEATURES			
Machine Colour	White	White	White	White
Decal Package	Basic	Basic	Basic	Basic
Axle Count	Single	Dual	Dual	Dual
Suspension	Spring	Spring	Spring	Spring
Tire Size	385/65R22.5	385/65R22.5	385/65R22.5	385/65R22.5
MECHANICAL				
Tilt Conveyor	Yes	Yes	Yes	Yes
In cab Controller	Yes	Yes	Yes	Yes
Bi-Directional Belt Function	Yes	Yes	Yes	Yes
ADD-ONS				
Working Lights	Yes	Yes	Yes	Yes
Truck Mount Compatible	Yes	Yes	Yes	Yes



# UNRIVALED DEALER SUPPORT

With a dealer network spanning across North America, we're committed to providing the right tools and education to our dealer partners. From a seamless machine purchase to unprecedented technical post-sale support, JBS customers are investing in much more than just a piece of agricultural equipment. We stand behind our machines and the people who sell them.

If you're looking for a dealer near you, please reach out and we'll put you in touch:

Call us: +1 604 826 5391

Email us: [dealers@jbsequipment.com](mailto:dealers@jbsequipment.com)



+1 604 826 5391  
[jbsequipment.com](http://jbsequipment.com)

©JBS® Equipment 2021



"JBS Equipment continues to be an excellent partner for us. The customers that have purchased spreaders from us have been pleased with the product performance and JBS' support. Our team can depend on them when servicing their products, keeping them running in the field."

Scott Raber  
Titan Machinery  
Fremont, Nebraska

JBS and its respective logo, "Bedding Flinger", "Low-Rider", "Track-Pack", "E-Series", "M-Series", "D-Series", "Float-Maxx", and "The field's the limit" are trademarks of JBS Equipment and may not be used without permission. This catalog was produced in 2021 and is correct at the time of printing. This content may be subject to change.





+1 604 826 5391  
[jbsequipment.com](http://jbsequipment.com)